

12
135

LEVEL III

AY-8750600

AD

AD A100273

TECHNICAL REPORT ARBRL-TR-02308 ✓

THE INFLUENCE OF PHYSICAL PROPERTIES
ON BLACK POWDER COMBUSTION

Ronald A. Sasse'

March 1981

DTIC
ELECTE
JUN 16 1981
S D
B



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
BALLISTIC RESEARCH LABORATORY
ABERDEEN PROVING GROUND, MARYLAND

Approved for public release; distribution unlimited.

DTIC FILE COPY

81 6 05 055

Destroy this report when it is no longer needed.
Do not return it to the originator.

Secondary distribution of this report by originating
or sponsoring activity is prohibited.

Additional copies of this report may be obtained
from the National Technical Information Service,
U.S. Department of Commerce, Springfield, Virginia
22161.

The findings in this report are not to be construed as
an official Department of the Army position, unless
so designated by other authorized documents.

*The use of trade names or manufacturers' names in this report
does not constitute endorsement of any commercial product.*

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
TECHNICAL REPORT ARBRL-TR-02308	AD-A100273	
4. TITLE (and Subtitle)		5. TYPE OF REPORT & PERIOD COVERED
THE INFLUENCE OF PHYSICAL PROPERTIES ON BLACK POWDER COMBUSTION		BRL Technical Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s)		8. CONTRACT OR GRANT NUMBER(s)
Ronald A. Sasse'		
9. PERFORMING ORGANIZATION NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
US Army Armament Research & Development Command US Army Ballistic Research Laboratory ATTN: DRDAR-BL Aberdeen Proving Ground, MD 21005		RDT&E 1L161102AH43
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE
US Army Armament Research & Development Command US Army Ballistic Research Laboratory ATTN: DRDAR-BLI Aberdeen Proving Ground, MD 21005		MARCH 1981
		13. NUMBER OF PAGES
		64
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report)
		UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)		
Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
Black powder Propellant Physical properties of black powder		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) (cit)		
<p>It has been observed that black powder made from ingredients of the same lot and fabricated using the same manufacturing procedure results in material exhibiting different burning rates. The current study was undertaken to determine if the physical properties of black powder affected burning rate and establish if these properties varied from one production batch to another.</p>		
(continued on back)		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	Page
LIST OF ILLUSTRATIONS	5
I. INTRODUCTION	7
II. EXPERIMENTAL	12
A. Black Powder Samples	12
B. Scanning Electron Microscopy of Black Powder and Charcoal	15
C. Compression of Sulfur, Potassium Nitrate and Charcoal .	15
D. Mercury Intrusion Porosimetry	16
E. B.E.T. Surface Area Measurements	17
F. Density Measurements	17
III. RESULTS	17
A. Black Powder and Charcoal S.E.M. Microphotographs . . .	17
B. Compression of Sulfur, Potassium Nitrate, and Charcoal.	18
C. Mercury Intrusion Porosimetry	28
D. B.E.T. Surface Area Measurements	28
E. Density Measurements	33
IV. DISCUSSION	33
A. Black Powder and Charcoal S.E.M. Measurements	33
B. Compression of Sulfur, Potassium Nitrate and Charcoal .	35
C. Mercury Intrusion Porosimetry	38
D. B.E.T. Surface Area Measurements	40
E. Density Measurements	44
V. FUTURE PLANS	47
VI. SUMMARY	49
ACKNOWLEDGEMENTS	49
REFERENCES	51
APPENDIX	55
DISTRIBUTION LIST	59

LIST OF ILLUSTRATIONS

Figure	Page
1. Comparison of burning rates as measured by flame spread, \circ (ref. 16); closed bomb, \square (ref. 14); and open air flame spread, \triangle (ref. 13)	14
2. Black Powder, Lot 1	19
3. Black Powder, Lot 6	20
4. Black Powder, Lot 10	21
5. Black Powder, Lot 11	22
6. Oak and Maple Charcoals	23
7. Oak and Maple Charcoals	24
8. Oak Charcoal Extracted from Lot 1	25
9. Maple Charcoal Extracted from Lot 11	26
10. Effect of pressure on potassium nitrate, sulfur, and charcoal	27
11. Volume of mercury entering three samples of black powder-Lot 6	29
12. Volume of mercury entering three samples of black powder-Lot 10	30
13. Volume of mercury entering whole grains of black powder: \blacktriangle -lot 11, burn rate 0.60 m/sec; \bullet -lot 10, burn rate 0.51 m/sec; \blacksquare -lot 1, burn rate 0.32 m/sec; and \blacktriangledown -lot 6, burn rate 0.38 m/sec	31
14. Volume of mercury entering half grains of black powder: \triangle -lot 11; burn rate 0.60 m/sec; \circ -lot 10, burn rate 0.51 m/sec; \square -lot 1, burn rate 0.32 m/sec; and \blacktriangle -lot 6, burn rate 0.38 m/sec	32
15. Relationship between burning rate and density of black powder reproduced from reference 1. Dimensions refer to pellet size	37
16. Relationship between flame spread rate and density. Subscripts refer to deviant lot number	39

LIST OF ILLUSTRATIONS (Cont'd)

Figure	Page
17. Passageway diameter distribution for whole grains of black powder. Dark portion repressed by a factor of 10	41
18. Passageway diameter distribution for half grains of black powder. Dark portion repressed by a factor of 10	42
19. Relationship between flame spread rate and surface area. Subscripts refer to lot number: 1-10 deviant lots; 11, 75-2, 75-61, 75-44 are GOEX material; 7-11 is CIL material; and M subscript samples were measured by Micromeritics Corp., others by NSW	43
20. Relationship between flame spread rate and free volume. Subscripts refer to lot number: +, values calculated by equation (3) and ⊙, values calculated by equation (4) .	46
21. Relationship between burning time and moisture content .	48

I. INTRODUCTION

Black powder was made in production mills in Europe as early as 1340 in Augsburg, 1344 in Spandau and 1348 in Legnica. The process, traceable to the early B.C. effort of the Chinese, evolved as an "art form" having historical rather than scientific origins. The development of the craft has been reconstructed by various authors and excellent accounts have been given by Urbanski¹ and Marshall.² The subject has been reviewed by Fedoroff and Sheffield³ who provide numerous references.

In essence, black powder has been made by grinding potassium nitrate, sulfur and charcoal into a very fine powder. This material is transformed into a cohesive conglomerate mass by either forming a paste which is forced through and divided by a screen, or the material is pressed into a cake. Both forms are subsequently broken into pieces. The small lumps or grains of black powder are then coated with graphite to retard the absorption of moisture and to prevent the grains from adhering. The grains are then screened to a particular size. This process has been standardized to some degree, in accordance with prevailing technology, but the operator adds water, adjusts temperature, selects grinding time, or changes compression pressure based on personal experience which is guided by individual judgment of color, odor, or general perception of the condition of black powder as it undergoes its various transformations. Such judgments are exchanged from experienced operator to journeyman.

Although the production of black powder was as great as 10.6 million pounds⁴ during World War I, the advent of smokeless powder diminished demand. This fact together with the inherent dangers of production, marked by occasional explosions, has resulted in closing most manufacturing facilities in North America. Because black powder still plays an important role in fuses and ignition devices the U. S. Army Corps of Engineers has built an Ammunition Plant in Charles town, IN and equipment was installed by ICI Americas, Inc. In designing the plant every effort was made to modernize the black powder manufacturing process and to make it as safe as possible. In the planning stage various studies were

¹Tadeusz Urbanski, *Chemistry and Technology of Explosives*, Vol 3, Pergamon Press, NY, pp. 322-346, (1967).

²Arthur Marshall, *Explosives*, Sec. Ed. Vol 1, History and Manufacture, P. Blakiston's Son and Co., Philadelphia, (1917).

³B. T. Fedoroff and O. E. Sheffield, *Encyclopedia of Explosives and Related Items*, Vol 2., PATR 2700, Picatinny Arsenal, Dover, NJ, pp. B165-B178, (1962).

⁴Arthur P. Vangelder and Hugo Schatter, *History of the Explosive Industry in America*, NY Columbia University Press, NY (1927).

conducted to: (1) elucidate and evaluate the ball and wheel mill process, (2) to investigate new techniques and equipment and (3) to compare the ballistic properties of black powder originating from this and other countries. The accumulated knowledge was used as a foundation for the design of the Indiana Plant. This work was reported in part by the Chromalloy Corporation,⁵ Battelle Memorial Institute,⁶ Olin Corporation⁷ and ICI Americas, Inc.⁸ Battelle⁵ published abstracts of 50 articles and 60 patents describing the wheel mill process in fine detail. This process, sometimes referred to as the "standard process", and used in the 1860's can be currently witnessed at the Belin Powder Works in Moosic, PA. The plant was built in 1911-12 and operated for many years by the E. I. du Pont de Nemours & Co. The plant is now owned and operated by GOEX, Inc., and supplies most of the military black powder requirements.

Particle size distributions obtained by "the standard process" were measured, using optical techniques, by Battelle Memorial Institute,⁶ as a function of both grinding time and moisture content. These results were compared to black powder made by another technique, the jet mill process, in which material is ground by impaction created by high velocity air streams. The jet mill process was developed by Kjell Lovold⁹ and is used in Norway to make black powder. The technique was incorporated in the Indiana Plant. Using the jet mill, particles are generally one third smaller than produced by the wheel mill. Also, J. C. Allen¹⁰ compared the

⁵Chromalloy Corporation, "A Study of Modernized Techniques for the Manufacture of Black Powder", Propellax Chemical Division, Final Report No. DAI-23-072-501-ORD-P-43, Jan 60, Chromalloy Corp., IL.

⁶H. E. Carlton, B. B. Bohrer, and H. Naak, "Battelle Memorial Institute Final Report on Advisory Services on Conceptual Design and Development of New and Improved Processes for the Manufacture of Black Powder", Olin Corporation, Indiana Army Ammunition Plant, 20 Oct 1970, Charlestown, IN.

⁷J. R. Plessinger and L. W. Braniff, "Final Report on Development of Improved Process for the Manufacture of Black Powder", RCS AMURE-109, Olin Corporation, Indiana Army Ammunition Plant, 31 Dec 1971, Charlestown, IN.

⁸Indiana Ammunition Plant, "Black Powder Manufacturing Facility", Vol. 1 and 2, Indiana Army Ammunition Plant, 1975, Charlestown, IN.

⁹Kjell Lovold, U.S. Patent No. 3660546, "Process for the Preparation of Black Powder", 2 May 1972.

¹⁰J. C. Allen, "The Adequacy of Military Specification MIL-P-223B to Assure Functionally Reliable Black Powder", Report No. ASRSD-QA-A-P-60, Ammunition System Reliability and Safety Div, Product Assurance Directorate, June 1974, Picatinny Arsenal, Dover, NJ.

effects of different milling procedures at various production facilities used in this and other countries.

Other types of preparation have been attempted which include dissolving sulfur⁵ by either carbon disulfide or alcohol and mixing this solution, or slurry, with charcoal and potassium nitrate before evaporating. Another innovation of note was pursued by Voigt¹¹ in which potassium nitrate was precipitated from solution by adding alcohol in a controlled manner to produce fine particles.

From the extensive background one general observation made in regard to the production of black powder is that the same manufacturing procedure, using the same ingredients, will result in lots exhibiting different burning rates. This has been the experience of GOEX, Inc. where fast and slow lots are blended to obtain a particular result. Although some of the factors which effect burn rate are known, the lot-to-lot variations have not been identified. One attempt to study the effect of small perturbations was supported by the Product Assurance Directorate, under the direction of J. C. Allen¹² where planned and slight deviations from a normal production run were purposefully and systematically introduced in ten lots of black powder made by the Indiana pilot plant. These samples were used to determine what manufacturing parameters are important in effecting the performance and combustion of black powder. These lots were termed "deviant lots" and will be described later. The burning characteristics of these and other standard lots were measured by four different laboratories: ARRADCOM (BRL¹³, LCWSL¹⁴), ICI Americas Corp.¹⁵

¹¹H. William Voigt, Jr., Pell W. Lawrence, and Jean P. Picard, "Process for Preparing Modified Black Powder Pellets", U.S. Patent, 3937771, Feb 10, 1976, see also H. W. Voigt and D. S. Downs, "Simplified Processing of Black Powder and Pyrotechnical Igniter Pills Including Low Residue Versions", Seventh International Pyrotechnics Seminar, Vol. 2, ITT Research Inst., Chicago IL, July 1980.

¹²J. C. Allen, "Concept Scope of Work For MM&TE Project 5764303 Acceptance of Continuously Produced Black Powder", Report No. SARPA-QA-X-10, November 1975, Picatinny Arsenal Dover, NJ.

¹³K. J. White, H. E. Holmes, J. R. Kelso Jr., A. W. Horst, and I. W. May, "Ignition Train and Laboratory Testing of Black Powder", ARRADCOM-BRL Report No. IMR-642, April 1979, APG, MD. See also K. J. White, H. E. Holmes, and J. R. Kelso, "Effect of Black Powder Combustion on High and Low Pressure Igniter Systems", 16th JANNAF Combustion Meeting, CPIA Publication 308, Dec 1979.

¹⁴L. Shulman, private communication, (data quoted in reference 13), 15 Jan 1978, Picatinny Arsenal, Dover, NJ.

¹⁵Hugh Fidler, private communication - Draft report, "Acceptance of Continuously Produced Black Powder", 8 March 1979, ICI America Corp., Charlestown, IN.

and Princeton Combustion Research Laboratories.¹⁶ These results were compared by Kevin White¹³ and will be presented later; it was concluded that the same trends were observed in each laboratory. Although there were differences in burning rates between various lots, the conclusion was that small perturbations in manufacturing procedures do not account for the difference of a factor of two in the observed flame spread rates. When these lots were compared with some GOEX, Inc. black powder, it was inferred that some other unidentified variable must be operative in these samples.

The performance of black powder, in contrast to its preparation, has been characterized in the classic papers of Noble and Abel¹⁷⁻¹⁸. Recently, Williams¹⁹ summarized burning characteristics and included several foreign references. Rose²⁰ studied the performance of black powder made from charcoal produced by various manufacturers and concluded that response could be traced to volatile content; he also presented an excellent review article.²¹ Kirshenbaum²² concluded from thermal DTA analysis that even when volatiles were removed from charcoal the same order of ignition was maintained and some other parameter besides volatiles affected the ignition of black powder. He also found that ignition temperature was not a function of carbon surface area, ash content nor of sulfur content. Further, activation energy was not a function of volatile content. Blackwood and Bowden²³ suggested that sulfur reacts with volatiles as an initiation step but Kirshenbaum showed that all three components, sulfur, potassium nitrate and charcoal, must be

¹⁶ Neale A. Messina, Larry S. Ingram and Martin Summerfield, "Black Powder Quality Assurance Flame Spread Tester", Final Report No. PCRL-TR-78-101, Dec 1978, Princeton Combustion Laboratories Inc., Princeton NJ.

¹⁷ R. A. Noble and F. Abel, Phil. Trans. Roy. Soc., London, Series A Vol. 165, 49-155, (1875).

¹⁸ R. A. Noble and F. Abel, Phil. Trans. Roy. Soc., London, Series A 203-279, (1880).

¹⁹ F. Williams, "The Role of Black Powder in Propelling Charges", Picatinny Arsenal Tech. Report No. 4770, May 1975, Picatinny Arsenal, Dover, NJ.

²⁰ James E. Rose, "Investigation on Black Powder and Charcoal", IHTR-433, Sept. 1975, Naval Ordnance Station, Indian Head, MD.

²¹ James E. Rose, "Black Powder - A Modern Commentary", Proc. of the 10th Symposium on Explosives and Pyrotechnics, 14-16, 1979, Franklin Research Inst. Philadelphia, PA.

²² Abraham D. Kirshenbaum, Thermochimica Acta, 18, 113, (1977).

²³ J. D. Blackwood and F. P. Bowden, Proc. Roy. Soc., London, A213, 285, (1952).

present to induce a low temperature pre-ignition exotherm. Perhaps one of the most persuasive experiments on the importance of volatiles was that of Blackwood and Bowden in which they dissolved volatiles from charcoal with acetone and applied them to charcoal that was 95 percent carbon. Black powder made from this material had the same behavior as standard powder.

Clearly, volatiles affect burning rate and Hintze²⁴ shows the relationship. He recommends 82.5 percent carbon content for charcoal and Blackwood and Bowden recommended 70 percent. However, neither work relates these percentages to a standard initial form of water or ash-free basis and it is not clear that the recommendations can be compared directly. Both authors do recommend a rather high volatile content. However, this parameter cannot be the only property that affects burning rate for the deviant lots have diverse burning rates incorporating the same charcoal.

In addition to the affect of volatiles, Shulman^{25,26} studied the influence of small amounts of water, to two percent on the burning rate of black powder; this study was expanded by Plessinger.⁷ These investigations quantify a well-known parameter.

From this discussion it is seen that the properties of charcoal are important, but the exact nature of the requirements necessary to make a good ballistic product are elusive. Present practice is that charcoal be made from porous light wood, maple being currently selected, and be of low ash content. No specification exists citing volatile content but current practice is that it be 20-30%. This specification is broad in that it requires charcoal which results in a proper performing black powder. The specification does not cite the wood, particulars relating to distillation, or physical properties. For black powder the amount of potassium nitrate, sulfur, and charcoal is given but compaction pressure is not. Only a density range for black powder is given. Such criteria result in a large latitude in allowable variance in the materials used to make black powder.

It appeared to this author that rather large variations in materials or in preparation of black powder resulted in rather small but measurable

²⁴Woldemar Hintze, *Explosivstoffe*, 2, 41, (1968).

²⁵L. Shulman, C. Lenchitz, L. Bottei, R. Young and P. Casiano, "An Analysis of the Role of Moisture, Grain Size, and Surface Glaze on the Combustion and Functioning of Black Powder", Picatinny Arsenal Report No. 75-FR-G-B-15, Oct. 1975, Picatinny Arsenal, Dover, NJ.

²⁶L. Shulman, R. Young, E. Hayes and C. Lenchitz, "The Ignition Characteristics of Black Powder", Picatinny Arsenal Technical Report No. 1805, Sept. 1967, Picatinny Arsenal, Dover, NJ.

variations in burning rate; lot-to-lot differences, using the same materials and techniques, was a dominant feature. It was for these reasons that another sensitive parameter was sought and a candidate hypothesis was that the degree of openness of a grain could influence burning rate. Soon the study evolved into an investigation of the physical properties of black powder and their relation to burning rate.

In an attempt to characterize black powder, scanning electron microscope photographs were obtained which showed extensive fusing of material. This immediately suggested that compaction studies be performed on pure ingredients to determine what material flowed and the functional relationship between flow and applied pressure. In addition the free volume was measured by mercury intrusion techniques. Further, the internal surface area was obtained from the Brunauer, Emmett, and Teller (B.E.T.) gas absorption technique. From these several measurements a physical description of black powder developed.

II. EXPERIMENTAL

A. Black Powder Samples

Deviant lots, mentioned earlier, were chosen for study as they were: (1) well characterized ballistically by four laboratories, (2) made from ingredients supplied by the same manufacturer, (3) fabricated by the jet mill process, and (4) representative pilot plant samples typical of future production techniques. Such samples were compared to black powder made by the "standard" wheel mill process at GOEX, Inc. The deviant lots were made from oak charcoal and GOEX, Inc., used maple. Equivalent compaction pressures were used by both manufacturers.

Due to the limited capacity of the Indiana pilot plant, their jet-milled meal was moisturized in a wheel mill at Picatinny Arsenal and pressurized at GOEX, Inc., to not less than 3500 psi, or 246 kg/cm². Fabrication has been described in detail¹⁵ and composition given in Table 1. For this table the carbon content has been recalculated on a moisture and ash-free basis. Also to obtain the high and low carbon content charcoals, three different lots of oak charcoal were used. The high carbon content charcoal was but eight percent greater than that normally used and the low carbon material was 17 percent below standard. The spread in these values is significant but small. Such samples were compared to GOEX, Inc., and CIL black powder produced by the standard process and made with maple charcoal. The burning rate data from various laboratories ARRADCOM (BRL,¹³ LCWSL¹⁴), and Princeton Combustion Research Laboratories¹⁶ are compared in Figure 1 reproduced from reference 13. The results are normalized to the burning rate data for a standard GOEX, Inc., lot, 75-44.

TABLE 1. DEVIANT BLACK POWDER LOTS

Lot Number	Description*	Density** g-cm ⁻³	KNO ₃ %	S %	Charcoal %	Flame Spread*** ms-l
1	High KNO ₃	1.86	78.01	8.50	11.95	0.32
2	Low KNO ₃	1.74	73.00	10.40	16.30	0.50
3	Poor Agglomeration of Ingredients	1.77	75.95	9.24	13.01	0.41
4	High Density	1.80	74.81	9.29	16.05	0.30
5	Low Density	1.67	74.94	9.07	14.46	0.43
6	High Glaze - 0.2%	1.78	74.88	9.23	14.08	0.39
7	High Carbon - 79.7%	1.67	74.52	10.13	15.21	0.36
8	Low Carbon - 51.6%	1.70	75.00	10.23	13.86	0.38
9	Large Particle Size - avg over 25 μ	1.70	72.50	10.97	13.59	0.34
10	Small Particle Size - avg over 10 μ	1.63	74.60	10.38	14.02	0.51
11	GOEX - Lot 75-44 - non-standard glaze	1.67	74.29	10.06	15.56	0.60
12	GOEX - Lot 75-44 - standard glaze	1.72	74.05	10.18	15.33	0.53
	GOEX - Lot 75-61					0.57
	GOEX - Lot 75-2					0.60
	CIL-7-11					0.49

* Oak charcoal in lots 1-7 and 9-10 are 73.8% carbon on an ash and moisture free basis.

** Bulk density

*** Open air flame spread values (ref 13).

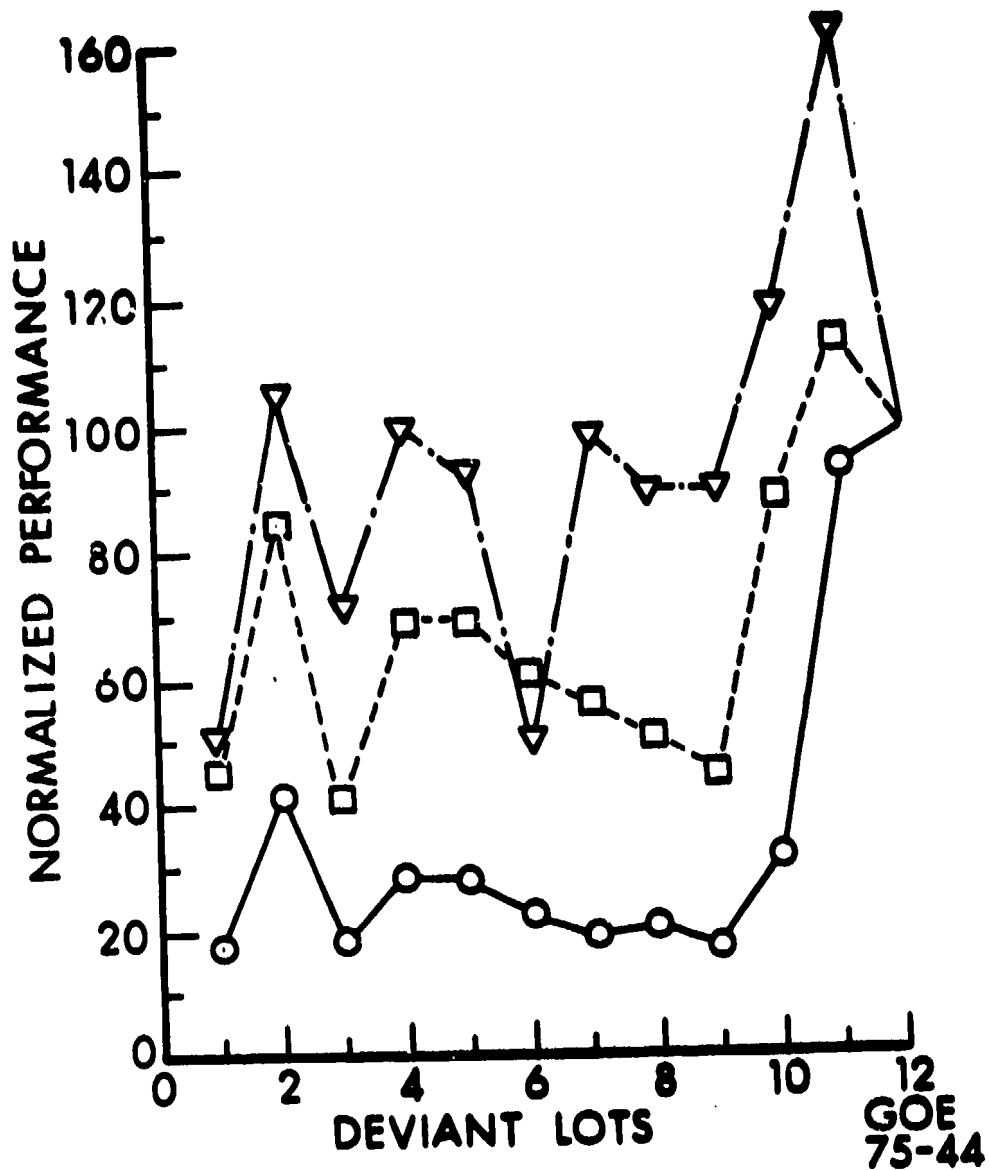


Figure 1. Comparison of burning rates as measured by flame spread, \circ (ref. 15); closed bomb, \square (ref. 14); and open air flame spread, Δ (ref. 13).

B. Scanning Electron Microscopy of Black Powder and Charcoal

S.E.M. photographs of black powder were obtained at two magnifications, 300 and 1000X, by John Gavel of the Analytical and Physical Measurements Services Section, E.I. du Pont de Nemours & Co., Wilmington, DE. Class one grains, those passing through a number 8 but not a number 4 sieve, were examined. They were cleaved in half by breaking the grains, much like snapping a twig, to insure that no tool smeared the surface. The new surface was coated with a 20 nm gold and palladium film; 30 keV electrons were used for analysis.

Another imaging technique was attempted using an electron microprobe, model M5-64 made by the Acton Laboratories Inc., of Acton, MA. In these experiments the sample was moved normal to the oscillating beam by a motor drive. The experiments were performed by Ralph Benck of the Penetration Mechanics Branch (PMB) of BRL. Both sulfur and potassium x-ray maps were obtained simultaneously using two detectors. Benck also analyzed the charcoal ash, from charcoal extracted from lots 1 and 11.

Other S.E.M. photographs of oak and maple charcoals were taken at the BRL by Gould Gibbons Jr., of the Explosive Effects Branch (EEB), using an International Scientific Corp. S.E.M. model ISI-40 made in Avon, CT. Oak charcoal was evaluated as received from the Indiana Ammunition Plant; however, it was pre-screened. Charcoal passing through an 80 but held on a 100 mesh screen was examined. The maple charcoal was of a larger particle size passing through a 10 but not a 20 mesh screen and, therefore, it was ground in a mortar and pestle to obtain particles of the same size as the oak. Both samples were obtained by the Indiana group from the Hardwood Charcoal Co. located in Steelville, MO. S.E.M. views were obtained at 100, 150, 500 and 2000X.

In addition, oak charcoal was extracted from lot 1 and maple from lot 11 black powder samples. They were extracted with water and carbon disulfide. For lot 11 magnifications of 150, 350, 750, and 1500X were employed; similar values were used for lot 1 and they were: 100, 250, 500, and 1000X.

C. Compression of Sulfur, Potassium Nitrate and Charcoal

Pure sulfur, potassium nitrate, and charcoal were each ground to a fine powder using a mortar and pestle. Samples between 1 and 2 grams were loaded into a Perkin Elmer Corp. potassium bromide infrared die, model 186-0025, made in Newark, CT. The powders were individually compressed using an Instron Corp. material testing instrument, model 2TDM, made in Canton, MA. The press's cross heads move at various, constant, pre-selected rates and the small compressive movement of 0.254 mm per minute was selected to insure some degree of pressure equilibrium. A total load of 3,000 kg cm⁻² or 40,000 psi was applied slowly. At maximum pressure the direction of the cross heads was reversed, at the same rate,

to obtain a decompression curve. In some cases the process was repeated twice to define the permanent effect of the first compression.

One sample of potassium nitrate was made damp by adding four percent colored water and grinding to a constant hue. The experiments were performed by Dominic Di Berardo of the PMB Branch of BRL.

D. Mercury Intrusion Porosit:

Internal volume and pore size distribution of either whole or cleaved grains of black powder were measured by Jean Owens of Micromeritics Corp. located in Norcross, GA. The technique subjected samples to mercury pressures to $3.5 \times 10^5 \text{ kg cm}^{-2}$ or 50,000 psi forcing liquid into pores having diameters greater than 30A. The grains of black powder were degassed by a 100°C flowing nitrogen stream for 40 minutes. The technique has been described by Orr²⁷ and Adamson.²⁸

Mercury, due to its high surface tension, does not wet most surfaces and pressure is required to force the fluid into small pores. Hence, the pore size is directly related to applied pressure and the relationship is given by equation 1.

$$Pr = -2 \sigma \cos \theta \quad (1)$$

where P is pressure, r is the radius, σ is the surface tension of mercury (taken as $474 \text{ dynes cm}^{-1}$) and θ is the contact angle (taken as 130° for most substances).

The distribution of such openings is given by a distribution function, D(r),

$$D(r) = \frac{P}{r} \frac{d(V_T - V)}{dP} \quad (2)$$

where V_T is the total penetration volume and V is the penetration volume with openings greater than r.

²⁷ Clyde Orr Jr., Powder Technol., 3, 117 (1969/1970).

²⁸ Arthur W. Adamson, Physical Chemistry of Surfaces, 2nd Ed., Interscience, NY, pp. 546-549, (1967).

E. B.E.T. Surface Area Measurements

In addition to the mercury intrusion measurements, Micromeritics Corp. also determined surface area by a single point B.E.T. technique using degassed whole grain samples and argon gas. This technique has been described in several texts, for example Flood,²⁹ where surface area is related to the number of argon atoms required to form a liquid film on a given surface. These measurements were extended to other samples by Eleonore Kayser of the Naval Surface Weapons Laboratory, NSW, in Silver Springs, MD, using the same type of Micromeritics equipment, model 2205.

F. Density Measurements

Even though density is defined clearly as gm/cm^3 , the measurement of volume for powders and compressed masses can be ambiguous. For this reason some experimental approaches will be discussed.

1. "Tap Density" is a term that has been used to describe the weight of a powder or objects poured into a known geometry and allowed to settle by one or more gentle means such as "tapping". Such values are not used in this study.

2. "Bulk Density" depicts the volume element inscribed by its outer surface. The volume is measured by sinking a powder or object into mercury at atmospheric pressure. Such values do not include pore volume and are given in Table 1 as reported by Pitler.

3. "True Density" is obtained by measuring the volume of an object as equal to the amount of non-absorbed gases it displaces. In such measurements helium is usually introduced into an evacuated sample and fills small pores. Similar values are obtained by using ether as the displacement fluid for evacuated samples,³⁰ or using mercury displacement at very high pressures of mercury. In this study an ether displacement measurement was made on non-evacuated samples to estimate the samples' true density. Flow of ether into the sample was aided by placing the pycnometer filled with black powder and ether in an ultrasonic bath.

III. RESULTS

A. Black Powder and Charcoal S.E.M. Microphotographs

Four black powder samples were chosen from the deviant lots for examination. Lots 1 and 6 are samples having slow flame spread rates of

²⁹F. Alison Flood, Ed., The Solid-Gas Interface, Vol. 1, Marcel Dekker Inc., NY, (1967).

³⁰R. M. McIntosh and A. P. Stuart, Can. J. Res. B2A, 124, (1946).

0.32 and 0.39 m/s as contrasted to lots 10 and 11 which have faster flame spread rates of 0.51 and 0.61 m/s. Further, lots 1, 6, and 10 are jet-milled oak products whereas lot 11 is a standard wheel-milled material of GOEX, Inc. The S.E.M. microphotographs are given in Figures 2, 3, 4, and 5. Stereo views were made but add little to the detail already shown and therefore are not presented. Potassium and sulfur x-ray maps were obtained but the concentration profiles did not show sharp boundaries as prominent features. The problem is the average particle size is about 15 microns or less and the x-ray maps depicted an average concentration to a depth of approximately 30 microns. Therefore such analysis represented an average concentration throughout the slab. For this reason those views have not been included.

The microprobe experiment was abandoned for black powder surface analysis, for although the sulfur and potassium x-rays were recorded simultaneously, and gave strong signals, the electron beam created a reaction path and the data could not be relied upon to depict the original sample. However, the microprobe did analyze the ash content of both extracted charcoals and calcium was found to be the dominant species and traces of silicon and phosphorous were noted. No other metals were detected. The ash content of maple charcoal was 2.3 percent and 11.9 percent was found for oak.

The S.E.M. microphotographs of the raw materials, oak and maple charcoals, are given in Figures 6 and 7. Extracted charcoals from black powder are shown for lot 8 in Figure 8 and for lot 11 in Figure 9.

B. Compression of Sulfur, Potassium Nitrate, and Charcoal

In the manufacture of black powder, damp meal typically containing materials of less than 25 microns, is pressed into a cake where various fabricators have used different compaction pressures. In general, a pressure is selected which will result in a finished grain density of approximately 1.7 and GOEX, Inc. employs a pressure no smaller than 246 kg cm⁻² or 3,500 psi. All of the S.E.M. microphotographs, Figures 2-5, show considerable plastic flow and fusing among particles forming extensive agglomeration larger than the original particle size. Therefore a compaction experiment was performed to determine the relationship between flow and applied pressure.

The results of compressing pure ground sulfur, potassium nitrate and charcoal are given in Figure 10. The relationships shown can be linearized by presenting the logarithm of applied pressure as a function of compaction. The density of this sulfur cake was 2.00 gm/cm³ and that of the damp and dry potassium nitrate cakes were both 2.08 gm/cm³. Literature values³³ are 2.07 and 2.109 gm/cm³ for these compounds and thus, at the maximum pressure used, no significant voids exist in either material. In these cases the decompression curve is almost vertical showing little elasticity and recompression forms a small envelope about the decompression curve. The oak and maple charcoal compression curves



50 microns



100 microns



Figure 2. Black Powder, Lot 1



50 microns



100 microns


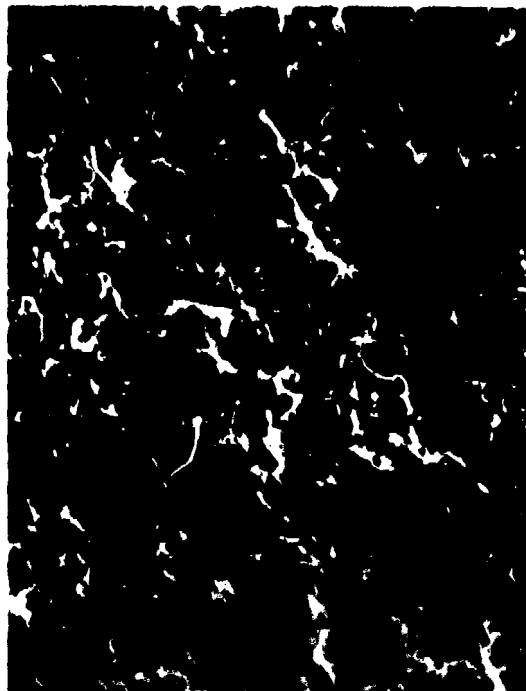


Figure 3. Black Powder, Lot 6




50 microns

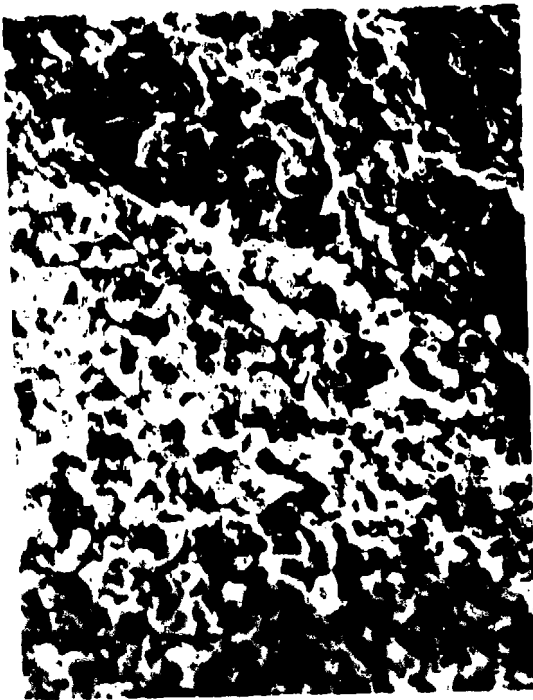

100 microns



Figure 4. Black Powder, Lot 10

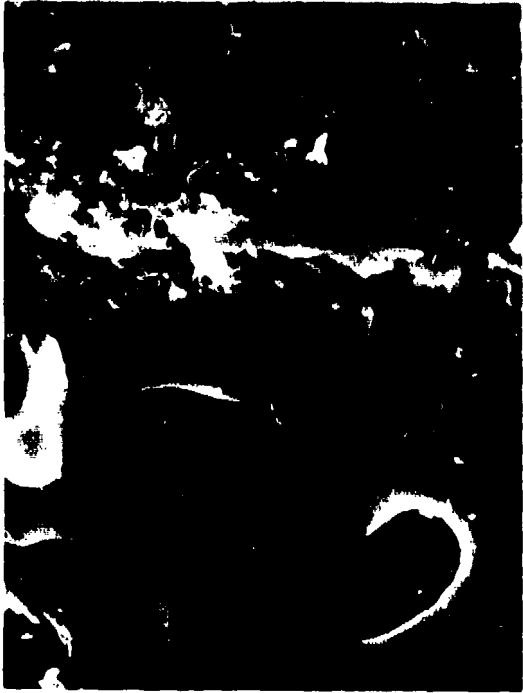


50 microns



100 microns




Figure 5. Black Powder, Lot 11

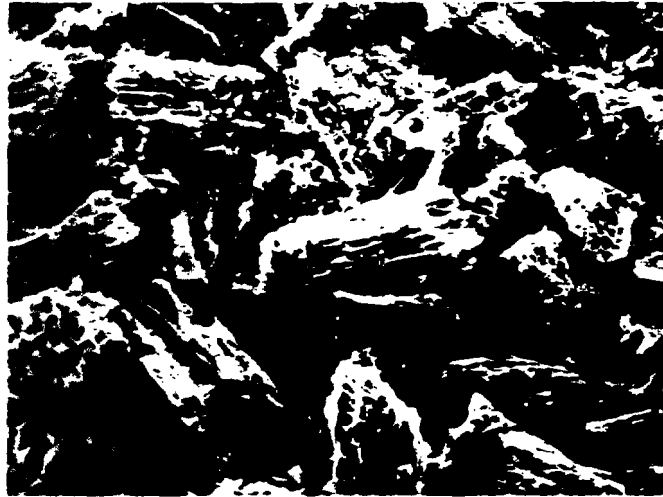


OAK

100 microns

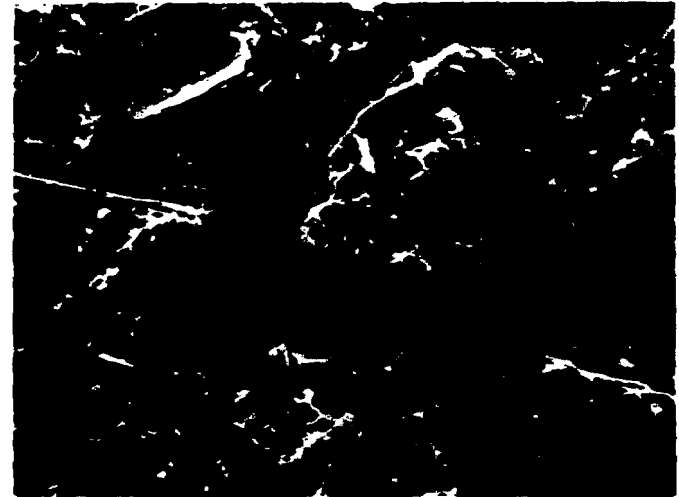


OAK

100 microns

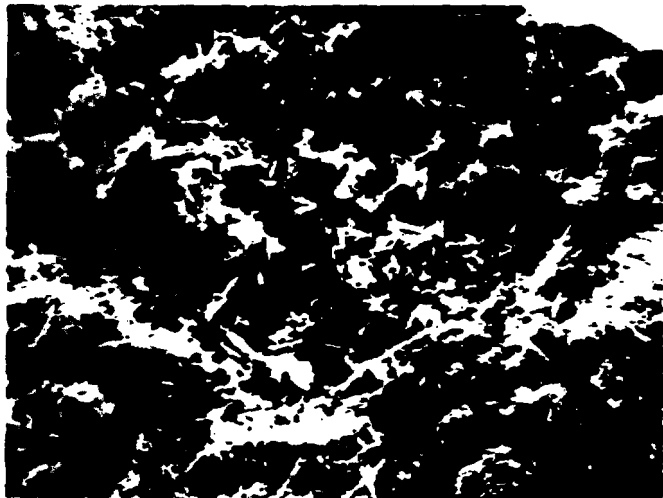

MAPLE


100 microns

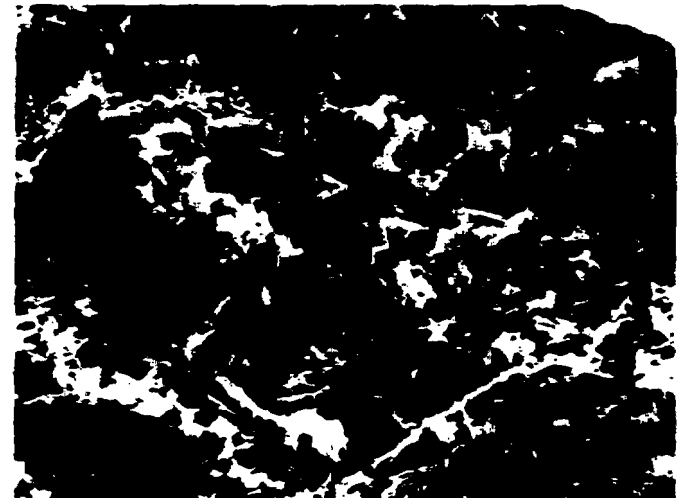

MAPLE


100 microns

Figure 6. Oak and Maple Charcoals

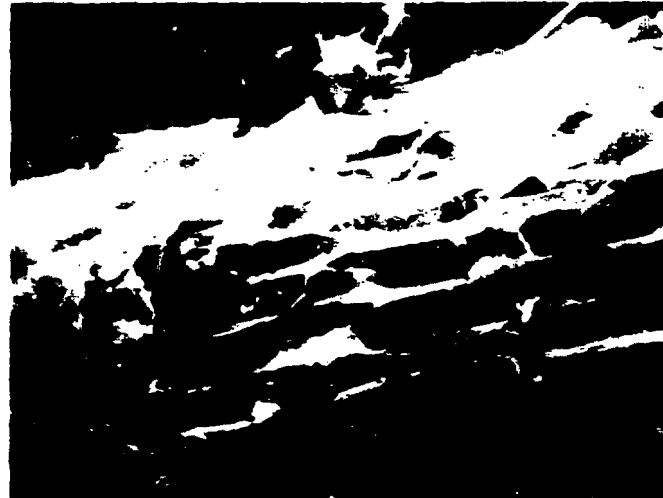


OAK

20 microns

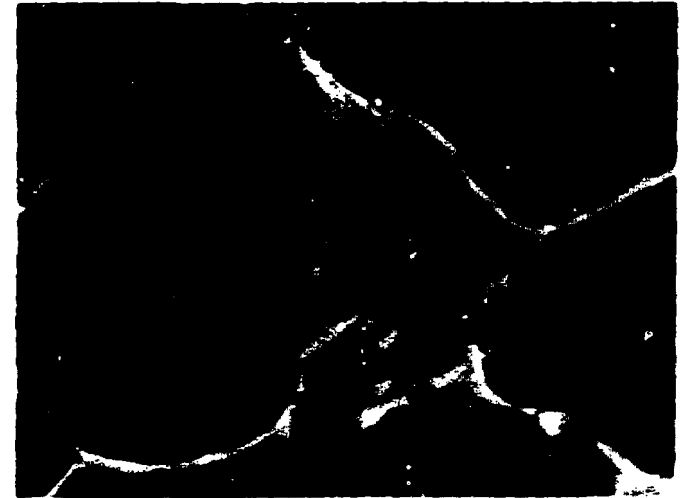

OAK

5 microns

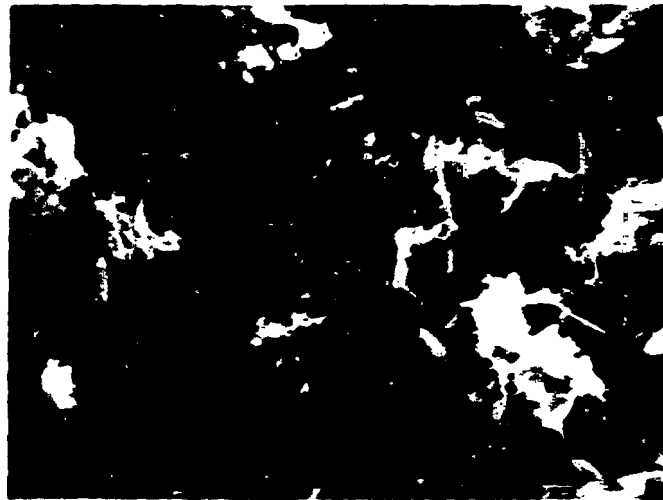

MAPLE

20 microns




MAPLE

5 microns


Figure 7. Oak and Maple Charcoals




100 microns

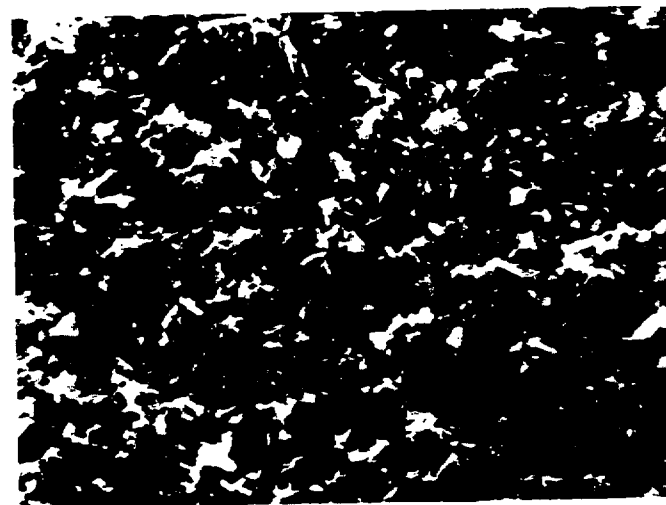

30 microns

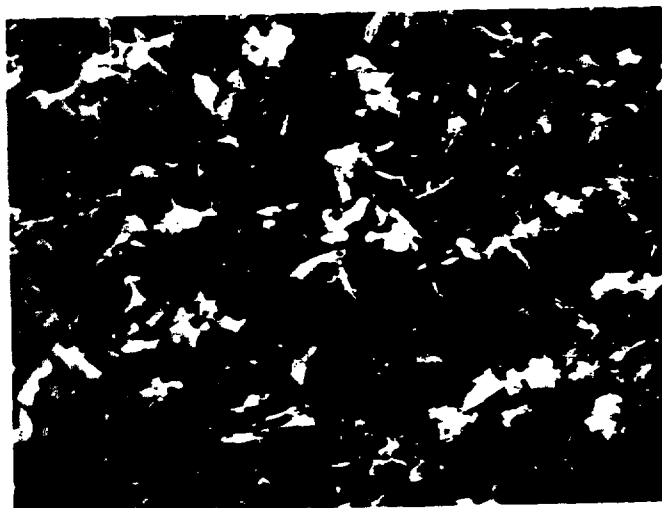


20 microns

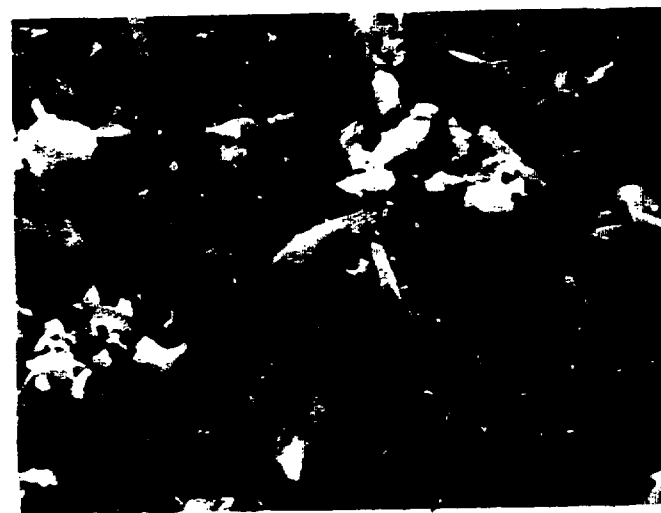


10 microns

Figure 8. Oak Charcoal Extracted from Lot 1

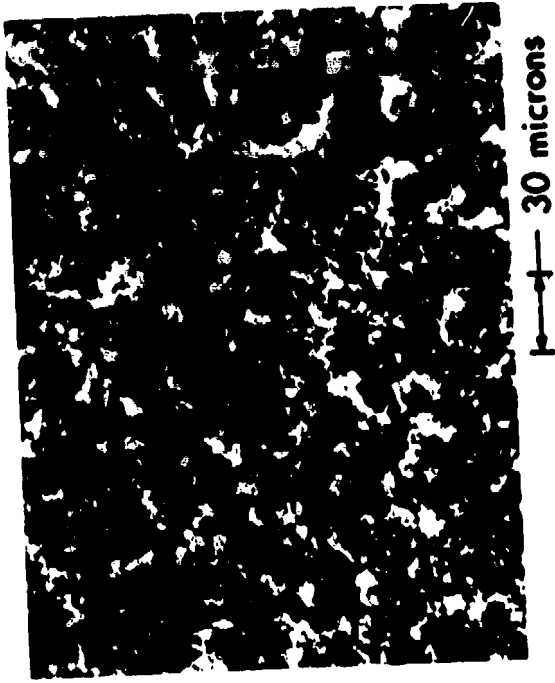


30 microns

100 microns

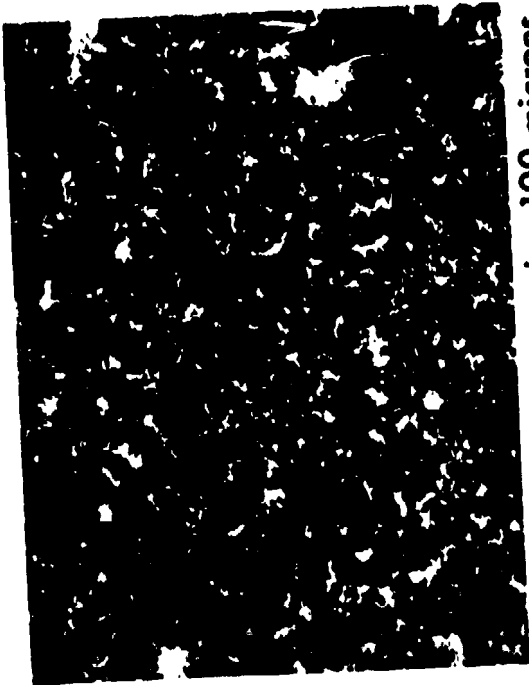

100 microns

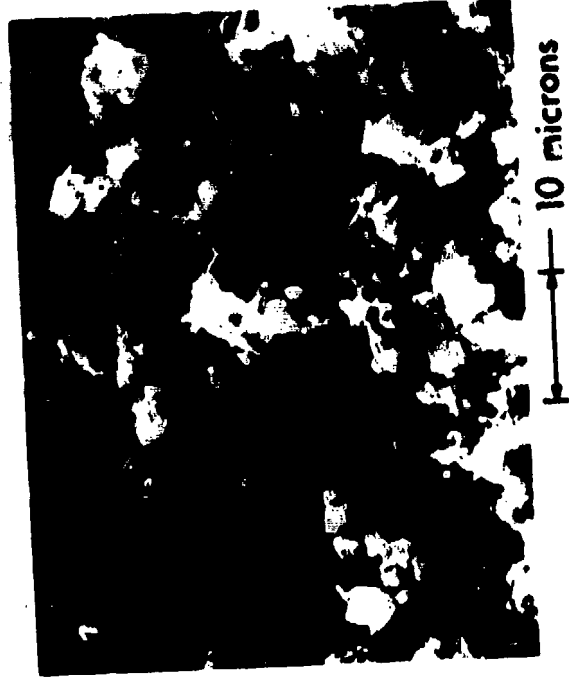

10 microns



20 microns

Figure 9. Maple Charcoal Extracted from Lot 11

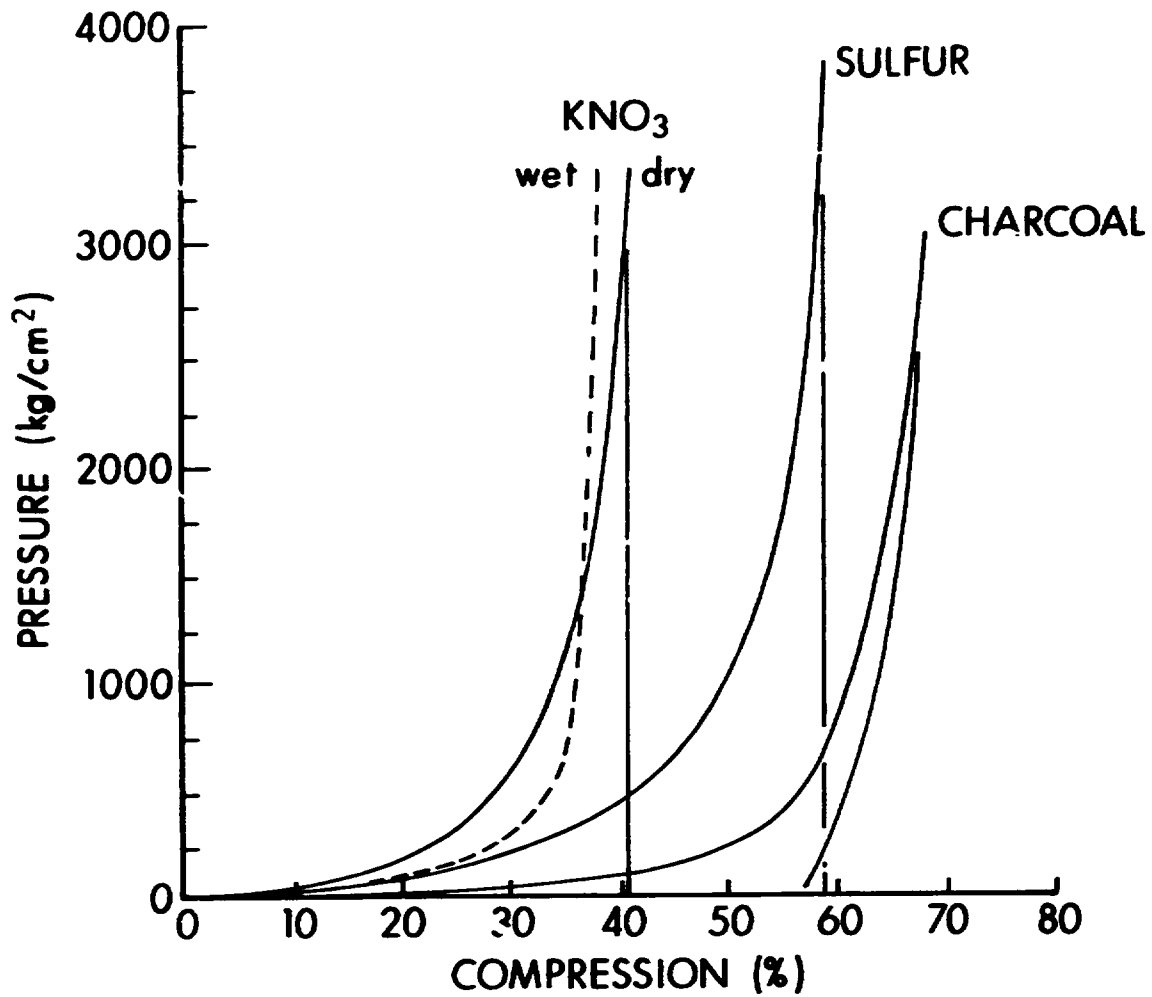


Figure 10. Effect of pressure on potassium nitrate, sulfur, and charcoal

were identical, but a compressed density of 1.01 gm/cm³ was measured for the maple charcoal and a density of 1.16 gm/cm³ was measured for oak to an accuracy of 0.5 percent. Values were obtained from the sample weight and die dimensions at maximum pressure. The decompression curves for both samples showed considerable elasticity. Interestingly, each sample was removed as a powder from the die and obviously the organics did not act as a binder.

In an attempt to interpret the compression density values, the densities of both charcoals were measured by an other displacement technique using a pycnometer. The density values were 0.99 and 1.17 gm/cm³ and were accurate to 1.0 percent. They were equal to those measured in the compression experiments. After compression, the charcoal originally passing through an 80 but not a 100 mesh screen, was again sieved and the results are given in Table 2. The values show that many pieces of charcoal were broken by the large applied force.

TABLE 2. CHARCOAL SIEVED AFTER COMPRESSION

<u>Screen Size</u> <u>Mesh Units</u>	<u>Oak*</u> <u>%</u>	<u>Maple*</u> <u>%</u>
100	24	51
120	12	8
200	38	26
340	26	15

*
% by weight

C. Mercury Intrusion Porosimetry

Three different samples of 1-2 grains of whole grain black powder, lots 6 and 10, were evaluated to determine the reproducibility of both the sampling and measuring techniques. Data are given in Figure 11 and 12 showing the cumulative amount of mercury forced into pores of different radii by various pressures. The data have been normalized at 200 psi or 14 kg/cm² and shows a good degree of reproducibility. One sample each of lots 1 and 11 was evaluated and this data is given together with a representative penetration curve for lots 1 and 6 in Figure 13. These same four lots were also evaluated by cutting the grains in half. These data are given in Figure 14. In all cases the cut or whole grains were intact after pressure was released.

D. B.E.T. Surface Area Measurements

The surface area of whole grains was measured by a B.E.T. analysis. All of the deviant lots were evaluated as well as GOEX, Inc. and CIL

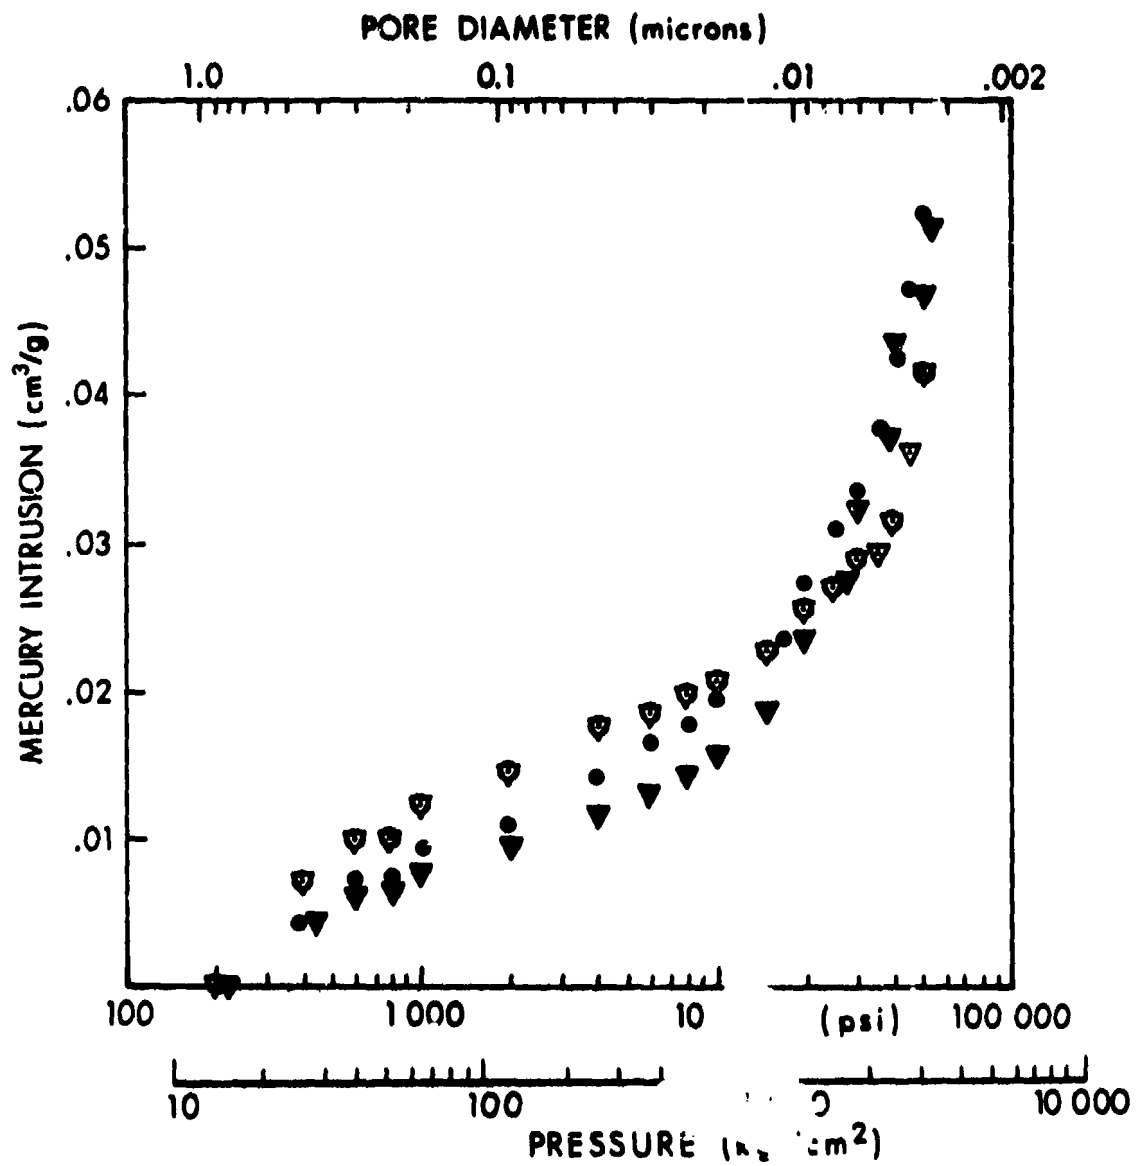


Figure 11. Volume of mercury entering three samples of black powder - Lot 5

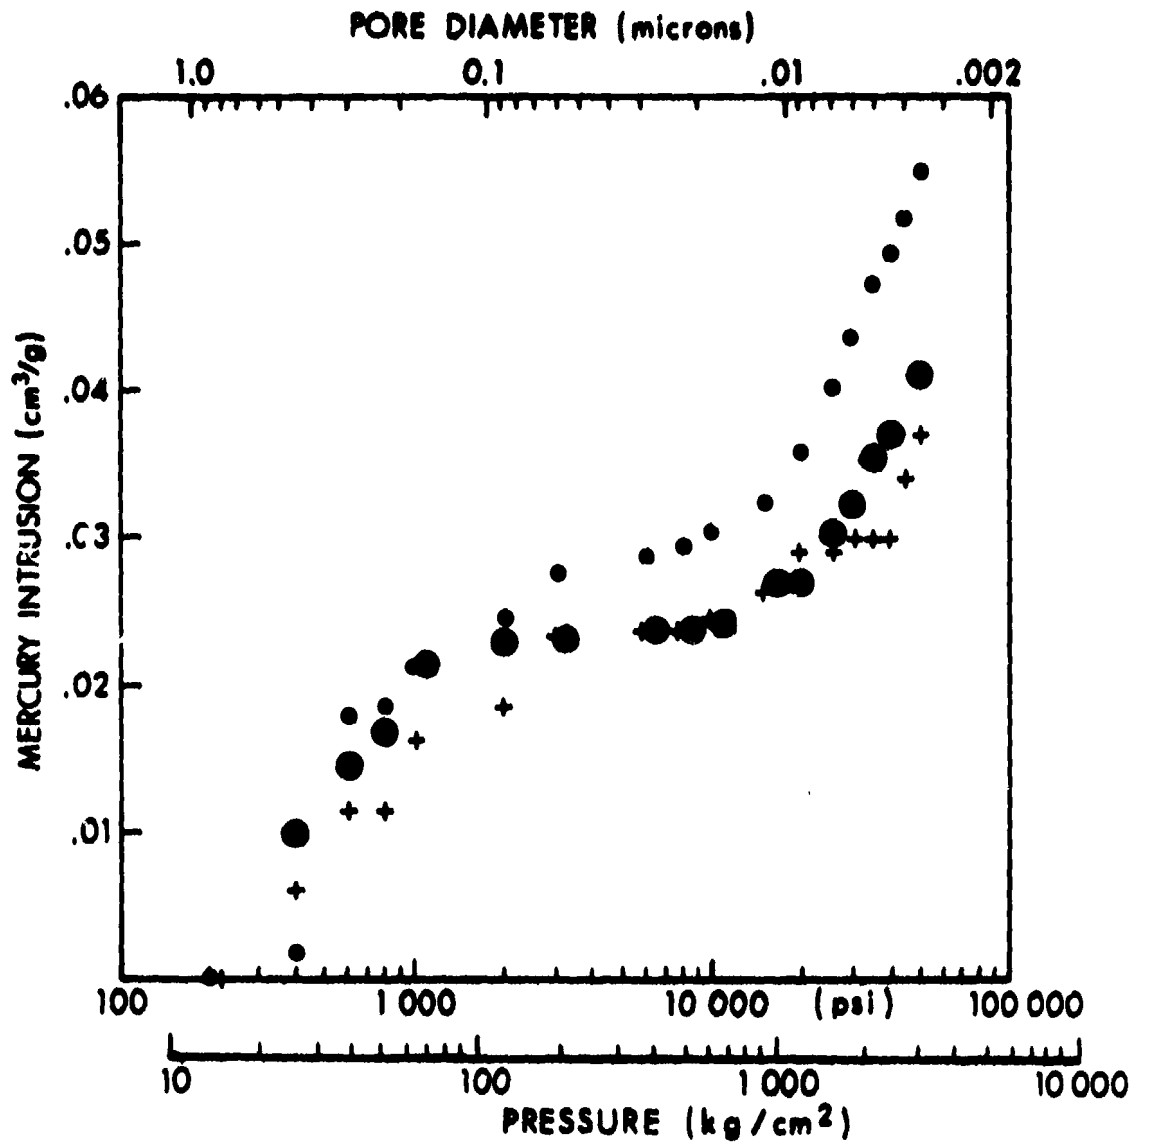


Figure 12. Volume of mercury entering three samples of black powder - Lot 10

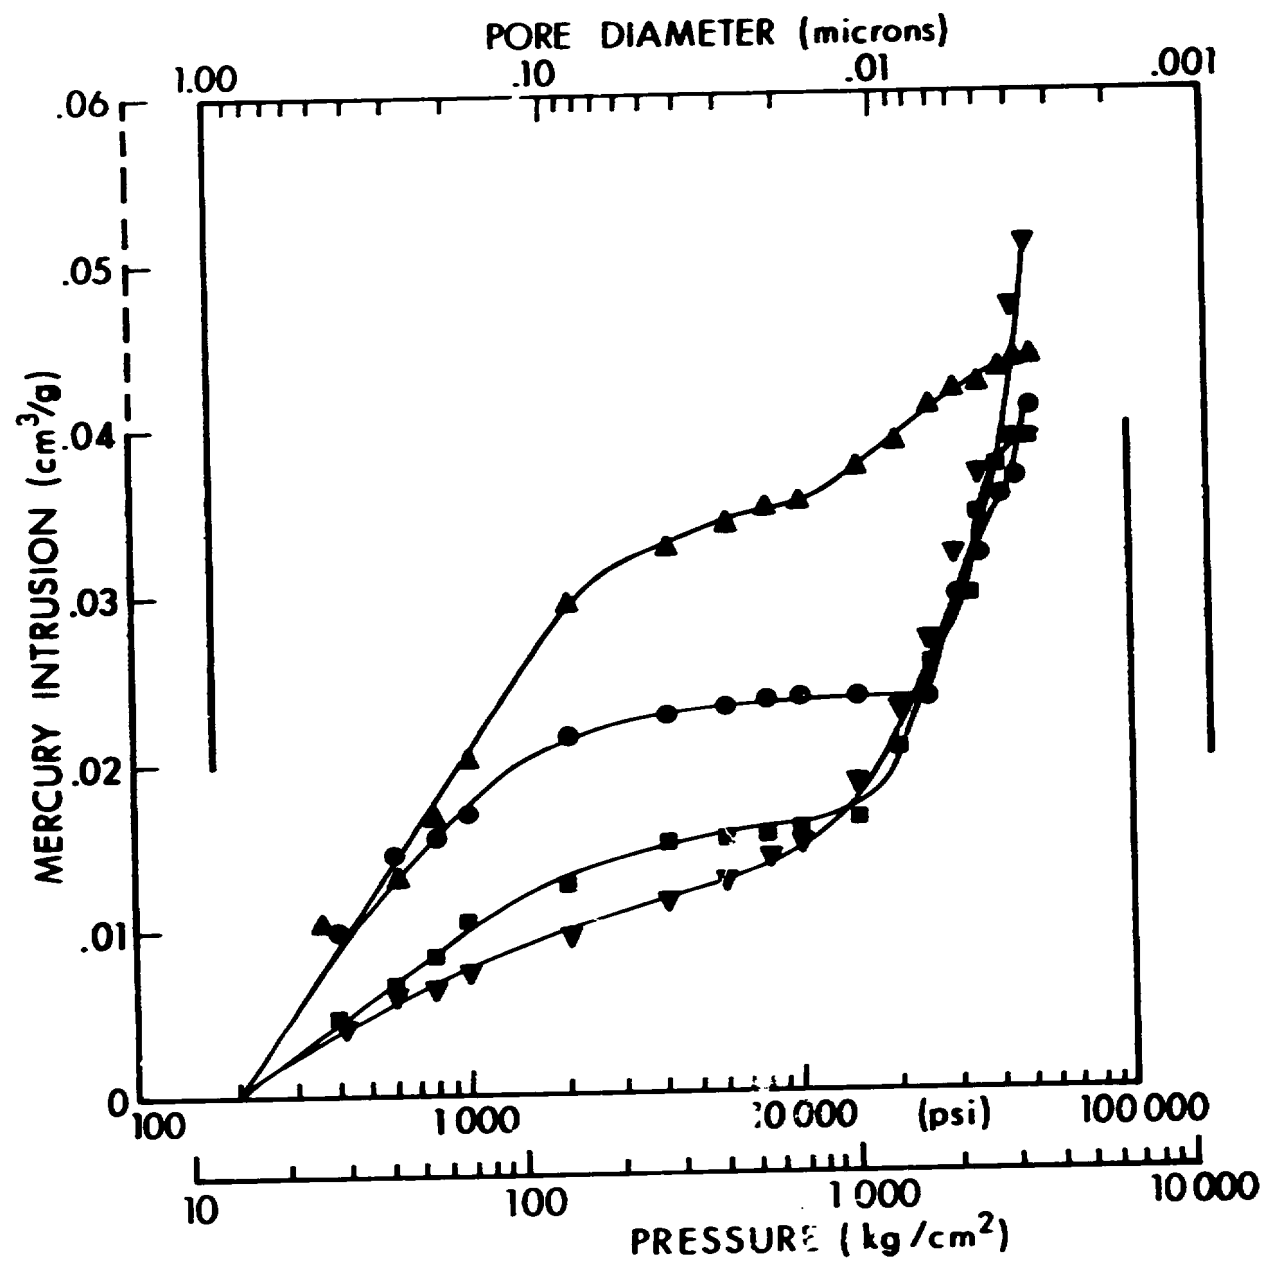


Figure 13. Volume of mercury entering whole grains of black powder: ▲ -lot 11, burn rate 0.60 m/sec; ● -lot 10, burn rate 0.51 m/sec; ■ -lot 1, burn rate 0.32 m/sec; and ▼ -lot 6, burn rate 0.38 m/sec.

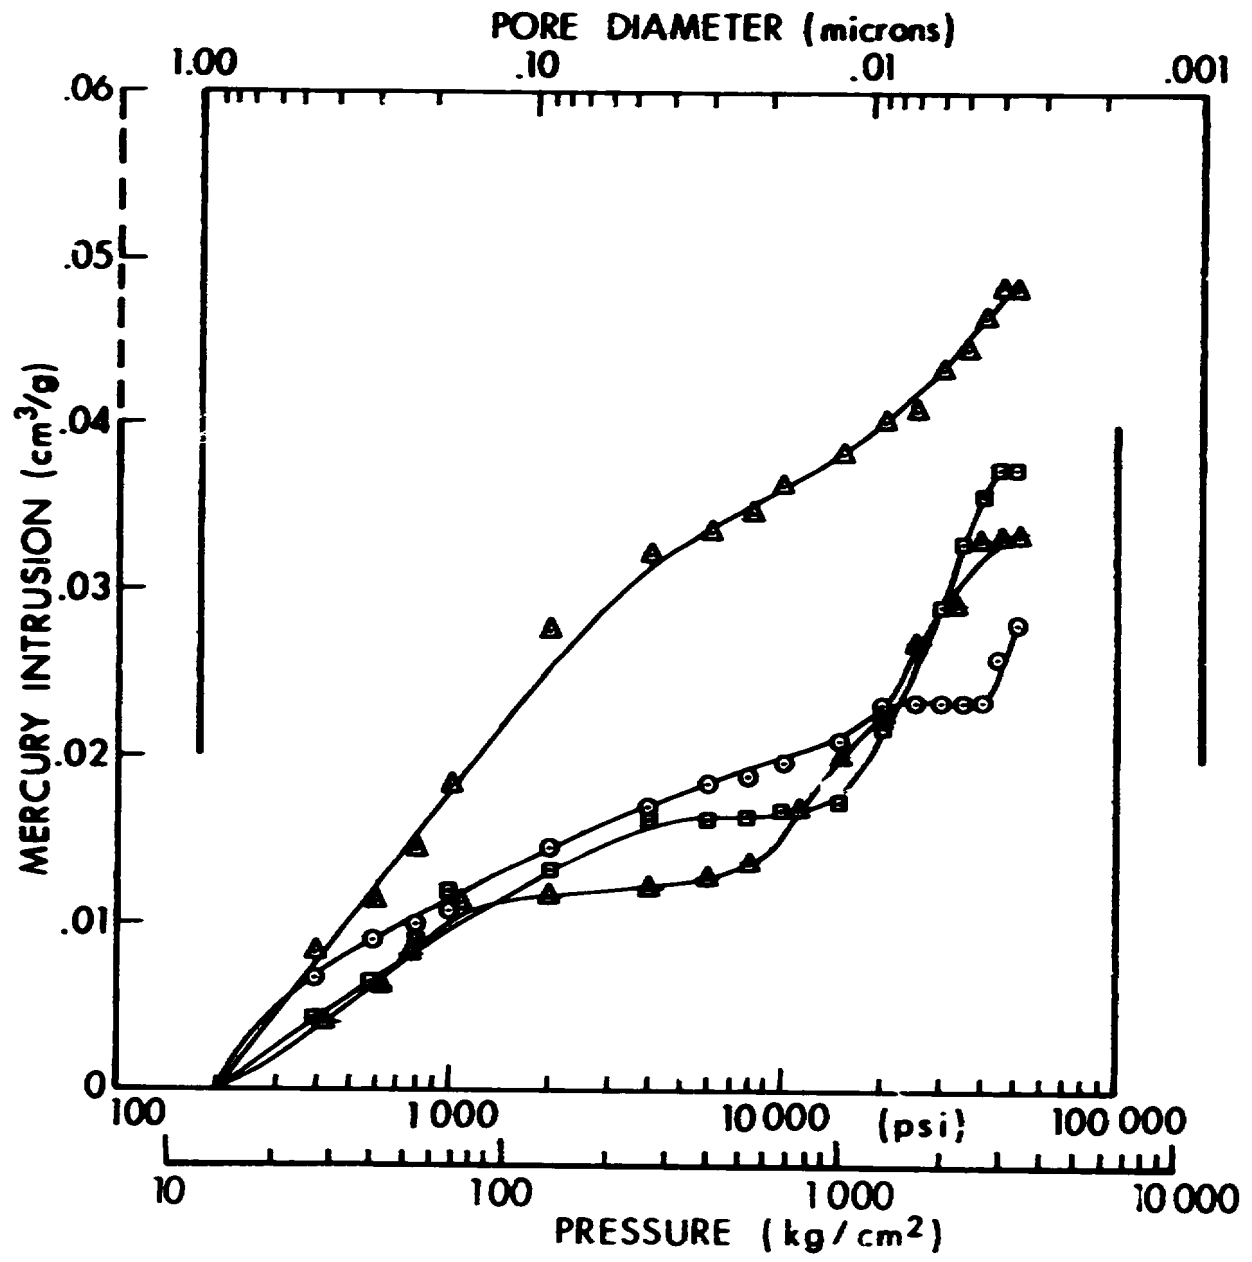


Figure 14. Volume of mercury entering half grains of black powder: ▲ -lot 11, burn rate 0.60 m/sec; ○ -lot 10, burn rate 0.51 m/sec; ◻ -lot 1, burn rate 0.32 m/sec; and ▼ -lot 6, burn rate 0.38 m/sec.

black powder. One lot, lot 6, was examined in detail to determine the variance and precision associated with sampling and measurement. The data are given in Table 3 and surface areas ranged from 0.5 to 1.0 $m^2 gm^{-1}$. Each individual sample was evaluated at least twice.

E. Density Measurements

The density of whole grains of black powder was measured by an ether displacement technique and values are given in Table 3. They were measured to an accuracy of one tenth of a percent.

The ether displacement density of charcoal extracted from lot 11 was 1.43. The densities of the maple and oak charcoals supplied from the Hardwood Charcoal Co., were 1.01 and 1.16. Reproducibility was as noted above.

IV. DISCUSSION

A. Black Powder and Charcoal S.E.M. Measurements

The microphotographs of deviant lots 1, 6, and 10, made by the jet mill process, look much alike. They are shown in Figures 2-4. Each figure shows two different views of a particular grain and these views are shown at two different magnifications. The view at 300X was attempted to get a general representation. A smaller subsection is shown at 1000X to provide greater detail. Higher magnifications were recorded but they lose the general nature of the features shown. Sulfur and potassium nitrate cannot be individually discerned; however from the relative abundance most of the features represent potassium nitrate.

Figure 2 shows a large isolated charcoal particle; clearly, compression did not fill its pores nor did it crush the charcoal. Thus in this instance incorporation of material into the charcoal pores, a process that has been ascribed to the wheel mill process,⁵ did not take place. In all figures considerable plastic flow and particle deformation are shown and many consolidated regions exist that are much larger than the original particle size of 10-15 microns. Figure 4, deviant lot 10, shows particles which appear more intact and are individually more discernable. Also the degree of plastic flow seems less. This leads to a greater degree of openness between particles.

The S.E.M. photograph of the GOEX, Inc. ball milled material, lot 11, Figure 5, is different from the three-jet milled samples. Large clumps of material are observed as well as large void regions. Again one piece of charcoal is evident and its pores are not filled, nor is it crushed. The pores are 2.8 ± 0.9 microns wide. In general, material seems to have flowed around the charcoal and the photograph shows almost geological folding. Stress lines and spherical pockets are noted in

TABLE 3. SURFACE AREA OF BLACK POWDER
AND ETHER DISPLACEMENT DENSITY

<u>Lot Number</u>	<u>Surface Area*</u> <u>m² gm⁻¹</u>	<u>Surface Area**</u> <u>m² gm⁻¹</u>	<u>Density</u> <u>gm cm⁻³</u>
1	0.50	0.588	1.91
	0.53	0.588	
2	0.73		1.87
	0.80		
3	0.54		1.88
	0.58		
4	0.060		1.89
	0.060		
5	0.58		1.85
	0.58		
6***	0.56	0.588	1.86
	0.55	0.587	
	0.52		
	0.57		
	0.53		
	0.51		
	0.62		
	0.52		
	0.55		
	0.58		
7	0.52		1.85
	0.52		
8	0.52		1.83
	0.52		
9	0.67		1.82
	0.63		
10	0.66	0.639	1.85
	0.62	0.630	
	0.66		
GOEX - Lot 11	0.82	0.801	2.02
	0.76	0.796	
GOEX 75-44	0.85		
	0.85		
GOEX 75-61	0.82		
	0.71		
GOEX 75-2	0.73		
	0.71		
CIL 7-11	0.69		
	0.58		
	0.57		

* NSW
 **Micromertics Corp.
 *** Average is 0.55 ± 0.04 .

consolidated regions. The grain is not as homogeneous in appearance as the jet-milled grain.

In summarizing the S.E.M. microphotographs, compaction seems to form a fused conglomerate mixture laced with a maze of interconnecting passageways.

The S.E.M. microphotographs of oak and maple charcoals are given in Figures 6 and 7. Oak charcoal appears as separate lumps having a clearly defined cell structure. The maple sample looks torn apart, perhaps by the grinding action of the mortar and pestle. However, both samples show extensive cell structure and broken and chipped pieces dominate.

One series of S.E.M. microphotographs of oak, Figure 8, which was ground in the jet mill and extracted from lot 1 black powder, Figure 9, looks similar to maple charcoal obtained in the same manner from lot 11 ground in a wheel mill. The particles seem to be of similar size and the only difference is the maple appears more rounded. No large charcoal pieces are evident in the maple photograph as was seen in its black powder counterpart but the view may not be totally representative.

In summary, it appears that grinding by either method produces a fine powder which has a multiplicity of edges, broken pieces and convoluted surfaces. The grinding process breaks down the gross structure of charcoal, forming pieces and fragments such that the two charcoals look much alike.

B. Compression of Sulfur, Potassium Nitrate and Charcoal

Noting the extensive flow in grains it became desirable to quantify the effect of pressure on black powder meal. Damp meal, that is generally 4 percent in moisture, has been pressed into a cake using various compaction pressures. Values of 1900 psi⁵ (134 kg/cm²) to at least 3,500 psi⁸ (246 kg/cm²)⁸ has been employed and some work was done at 8,000 psi³¹ (563 kg/cm²). The range of these values raised the questions, "do these compaction pressures span the individual yield points of the ingredients and is a particular pressure threshold required to induce plastic flow?" To answer these questions an experiment was performed to determine if the change in volume, or plastic flow, was uniform as the applied pressure was increased.

The effect of pressure on the pure materials was determined and shown in Figure 10. From the curvature, it can be seen that each material flows throughout the applied pressure range. This is a reminder that the applied pressure is a global value but the microscopic pressure exerted between particles can be much greater. One compression

³¹*Memorial Des Poudres Et Salpêtres, Vol. 6, Chapter II by M. Vieille, Gauthier-Vallars Et Fils, Imprimeurs-Libraires, Paris, pp. 256-391, (1893).*

curve using damp potassium nitrate, four percent moisture, lies well under its dry counterpart showing that water reduces friction, allowing particles to slide. Thus, applied pressure and water content are coupled phenomenon which govern grain density.

It was noted that both potassium nitrate and sulfur formed smooth glass like surfaces at the die faces. Such a surface could seal the pellet and this effect could explain why black powder pelletized in a pellet press exhibits slow relative quickness values.⁵ Additional descriptions of this effect can be found in the Ordnance Explosive Train Handbook³² that describes the burning of a train of several pellets as a succession of puffs caused by burning through the "glazed interface". In such applications, these effects are reduced by pressing pellets as interlocking cones to minimize the effects of burning through a sharp boundary.

In addition to the surface effect of pressed pellets, there is a density profile that should be considered when pressing to a given grain density.

The charcoal compression curve is similar to that of potassium nitrate and sulfur. From the facts that bulk density at maximum compression and ether displacement density are equal and that compression fractures charcoal (Table 2), it is clear that pressure fractures some of the charcoal into smaller fragments which then bend elastically to fill the die leaving very little space between particles. With a density of 0.99 for maple and 1.17 for oak charcoal, both far removed from the amorphous carbon value³³ of 1.8 - 2.1, it is concluded that the density of charcoal reflects an open structure.

The compression results show a gradual change in volume with applied pressure. This reflects that applied pressure is a global value and the associated microscopic pressure between small areas of two touching particles is much greater. The smooth exponential curves show no sharp transitions that could be associated with yield points nor are any threshold values indicated.

The effect of compression on black powder meal is yet to be done but the effect of pressure is to increase density. Vieille³¹ in 1893 demonstrated the relationship between black powder bulk density and burn rate. The data was reproduced by Urbanski¹ and his graph is given in Figure 15. Obviously the data relate to a process and materials different from those used today, but the trends should still persist. This same type of

³²*Naval Ordnance Laboratory, Ordnance Explosive Train Designers Handbook, NOLR 1111, April 1962, Naval Ordnance Laboratory, White Oak, MD.*

³³*Robert C. West, ed., Handbook of Chemistry and Physics, 51st Ed., The Chemical Rubber Co., Cleveland, Ohio (1970-1971).*

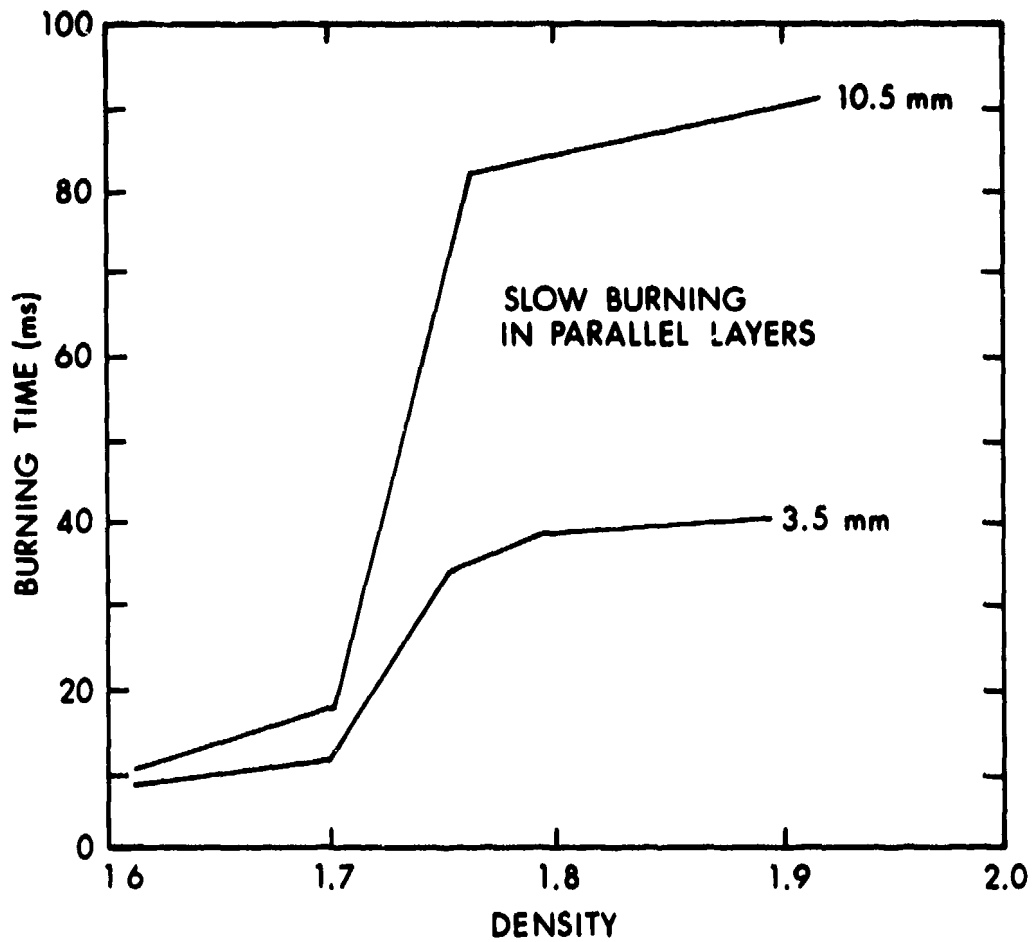


Figure 15. Relationship between burning rate and density of black powder reproduced from reference 1. Dimensions refer to pellet size.

relationship was shown to be operative in pyrotechnic mixtures where burning rate was given as a function of compaction pressure.³⁴

Vieille investigated the large density neighborhood of 1.44 to 1.85. In contrast, present experiments, using material that was available, define a more restrictive neighborhood and the parameter is not illustrated as clearly. Since Vieille's reference is not readily available, the liberty has been taken to translate his summary. This translation was undertaken by Eli Freedman of our laboratory (BRL-Applied Ballistics Branch) and is given as an appendix.

The flame spread rate and densities for the deviant lots, given in Table 1 are shown as a scattered presentation in Figure 16. A functional relationship appears to exist but its exact nature is not given by these limited data. The scatter leads to the belief that compression conditions were not identical; however, it is clear that flame spread rate decreases as density increases.

C. Mercury Intrusion Porosimetry

Equation (1) relating pore size and applied pressure presumes that the pores are a collection of right cylinders of different radii. In practice small openings exist leading to a larger volume element. Such a situation has been termed an "ink bottle effect" and when encountered will lead to an overestimate of the number of pores that exist at a particular radius. For loose powders, corrections are attempted by measuring the mercury extruded as a sample is depressurized. In accordance with equation (1) the neck of the "ink bottle" will empty as well as the "bottle" itself but at different pressures. For compacted material, such a black powder equilibrium may be too slow to attempt this correction depressurizing technique. These problems should be considered when examining the intrusion data and the indicated radii should be considered as approximate values. However, the mercury volume entering a grain is exact.

In examining the S.E.M. microphotographs of black powder many voids are apparent with radii of 10 microns or less. For mercury to penetrate the grain and reach these voids it must intrude through passageways that are small and are not particularly apparent in the view of the plane presented. Therefore, in filling such a void through a small passageway the mercury will fill the system indicating a pore volume having the radius of the passageway. The mercury penetration data, including this effect, are given in Figures 11, 12, 13, and 14. All of the data have been normalized to 200 psi or 14 kg/cm². Three different

³⁴ A. A. Shidlovskii, "Principles of Pyrotechnics", Air Force Systems Command, Report No. AD-A001859, 23 Oct 1974, Wright Patterson AFB, OH, Translation of *Izd Masmostroyeniye, Osnovy Pirotekhniki*, 3rd Ed., Moscow (1964).

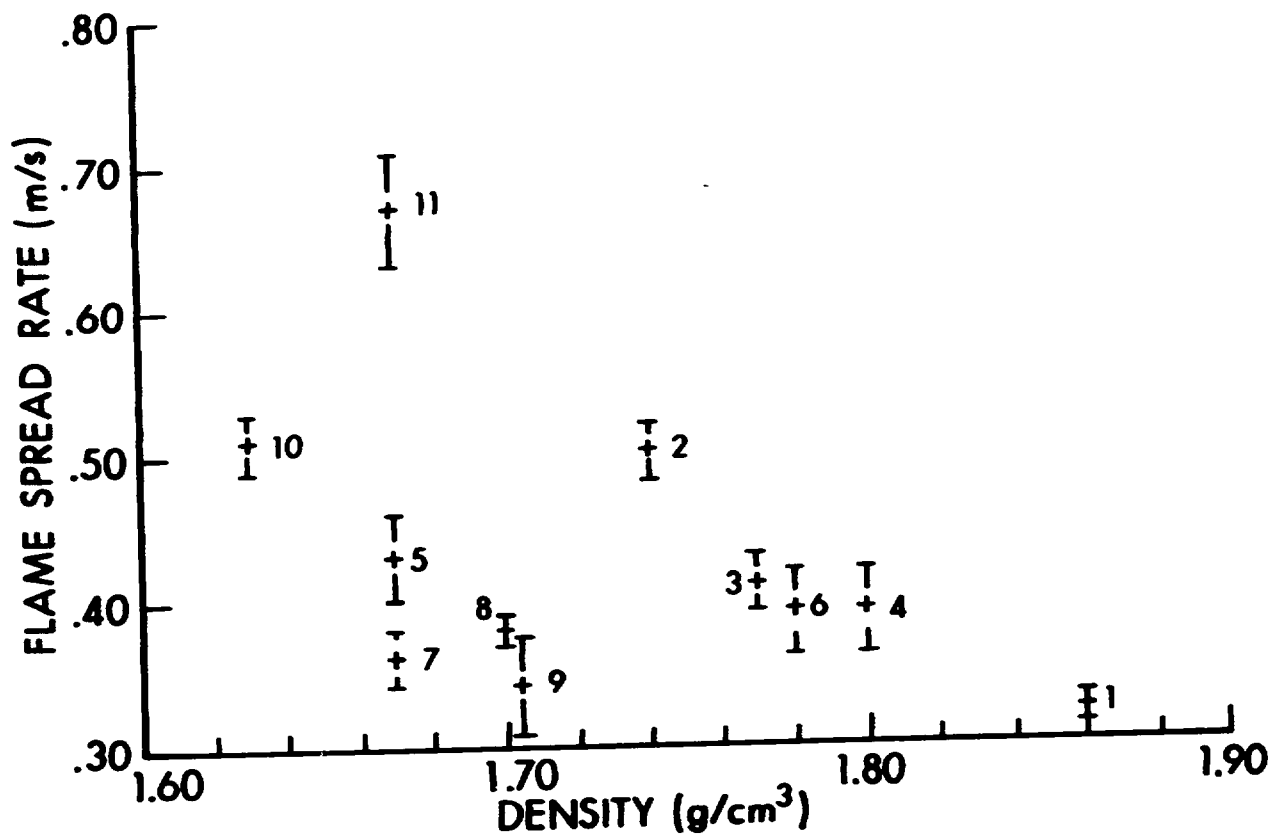


Figure 16. Relationship between flame spread rate and density. Subscripts refer to deviant lot number.

whole grain samples of lots 6 and 10 were evaluated, Figures 11 and 12, to determine the reproducibility of the sampling and measuring technique. The penetration data for these samples shows fair agreement and most of the mercury entered through passageways between 0.1 and 1.0 micron meter. The experiment was expanded to include lots 1 and 11 and the data are presented in Figure 13 for whole grains. The experiment was repeated on new samples of these lots where the grains were first fractured in two. The penetration volume is presented for half grains in Figure 14. The data for lot 10 appears to be in error, and for this sample some of the grains may have been crushed by the applied pressure.

The mercury intrusion data for the four lots of black powder are nearly the same for either whole or cut grains; neither group showing major differences in penetration pattern. On this basis, it is concluded that the graphite coating does not seal the grain to pressurized mercury. The two experiments also show that mercury must be able to reach the interior of a grain since cut and whole grains host the same volume of penetration. If mercury intrusion had been related to the black powder surface, then penetration between whole and cut grains would have been approximately proportional to the ratio of the surface area of a sphere to two corresponding hemispheres or 2/3. This was not found to be so and the conclusion is that the mercury penetrated throughout the grain.

The distribution of passageways was calculated using equation (2) and the data of Figures 13 and 14. The calculation is primarily dependent on the slopes shown; therefore, it is not affected by the normalization. The distribution is given in Figures 17 and 18. A correlation exists between the number density of passageways between 0.2 and 0.1 micron and flame spread rate. No such relationship was evident for the smallest of radii and this range will be discussed later.

D. B.E.T. Surface Area Measurements

The intrusion data can be used to calculate internal surface area but because of the "ink bottle effect" the result would be suspect. For this reason the surface area was measured by the B.E.T. technique and the results are given in Table 3 and plotted as a function of burning rate in Figure 19. The standard deviation for four samples of lot 6 is 6.6 percent and similar agreement on replicates of the same sample was found. It is clear that an increase of internal surface area increases burning rate. The graph, Figure 19, contains several markedly different black powder samples including the jet-milled oak deviant lots, maple GOEX Inc., powder and one CIL sample. The latter two producers used the ball-wheel mill process. Overall, the samples appear to follow the same function even in the small neighborhood tested where the density of black powder does not vary to any great extent. It remains to the future to develop a broader neighborhood for investigation. Under these constraints the relationship between burning rate and the degree of openness of a grain of black powder seems reasonable.


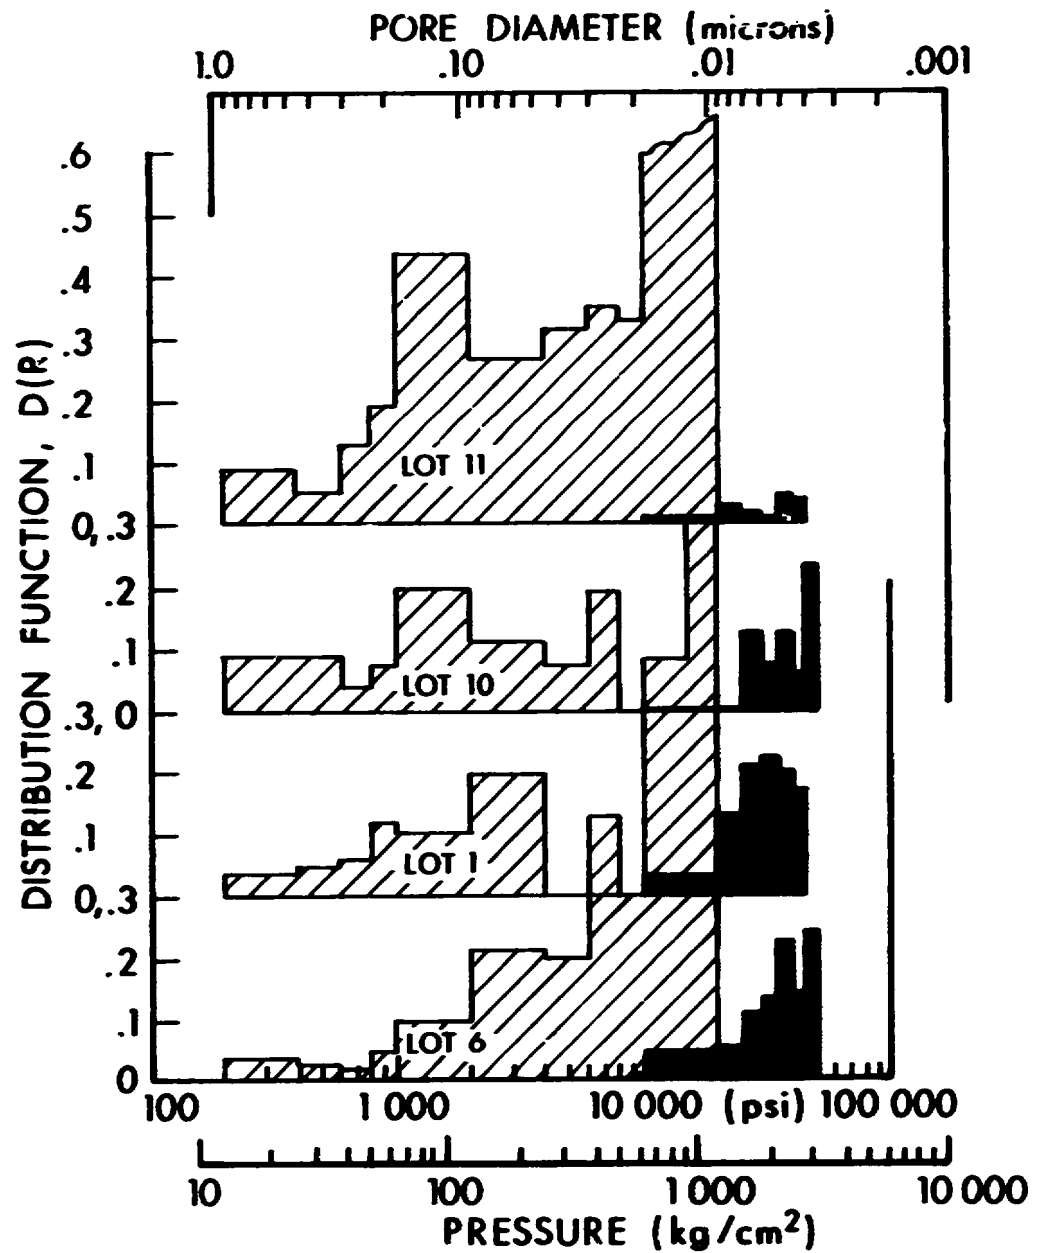


Figure 17. Passageway diameter distribution for whole grains of black powder. Dark portion repressed by a factor of 10.

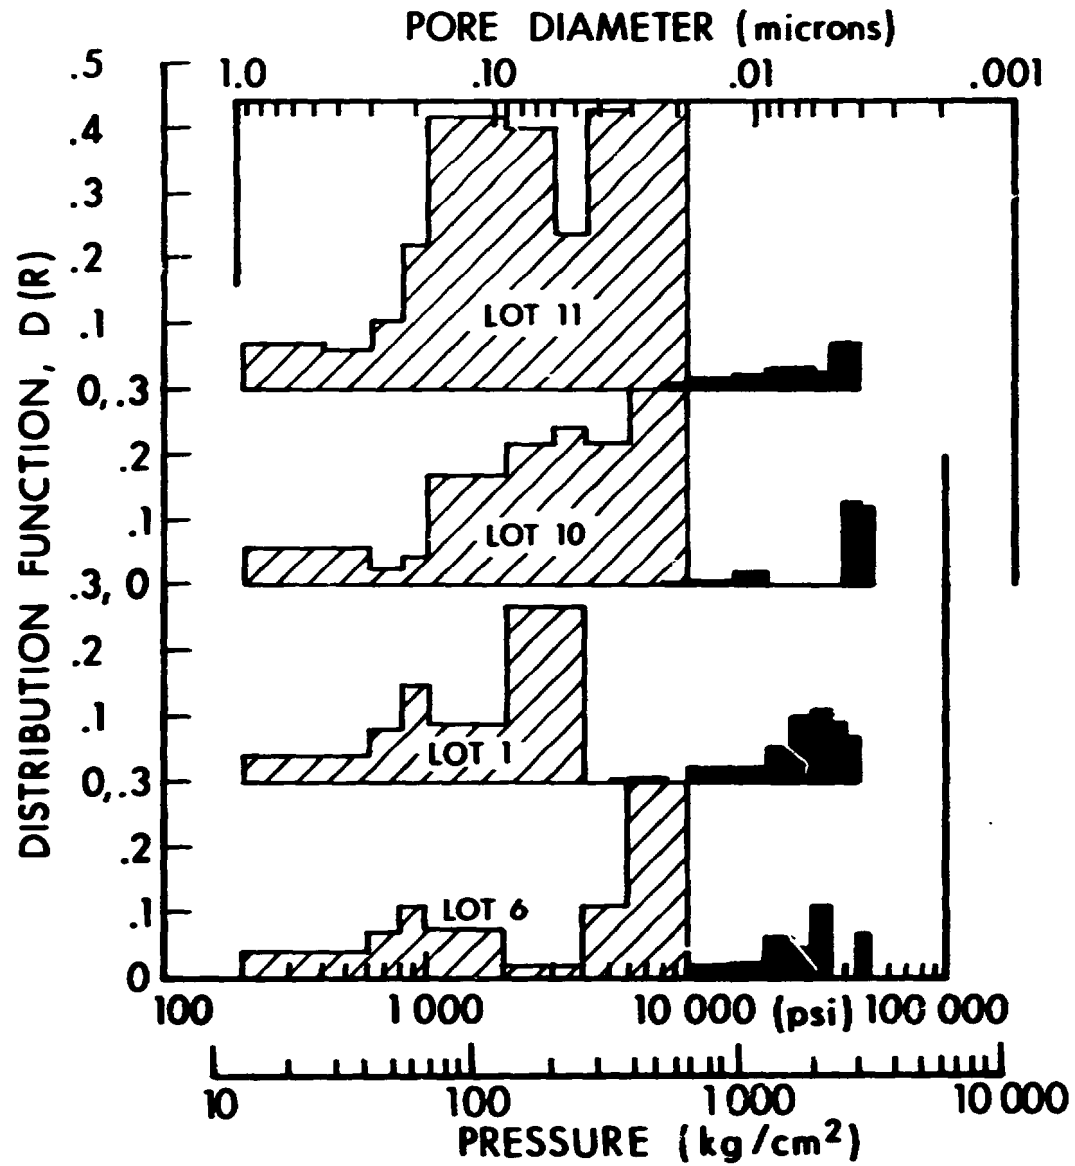

42

Figure 18. Passageway diameter distribution for half grains of black powder. Dark portions repressed by a factor of 10.

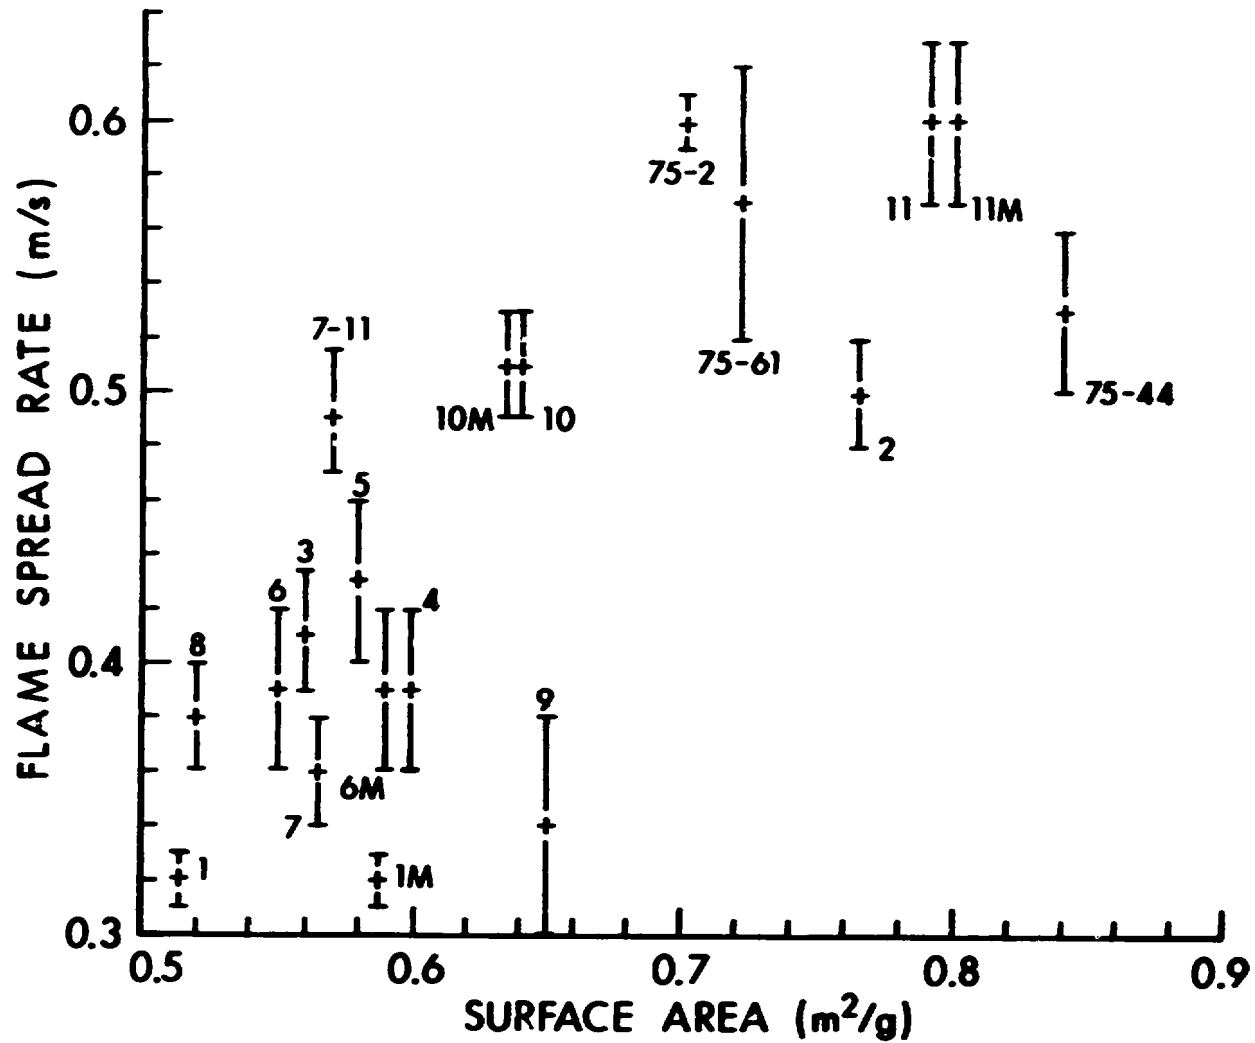


Figure 19. Relationship between flame spread rate and surface area. Subscripts refer to lot number: 1-10 deviant lots; 11, 75-2, 75-61, 75-44 are GOEX material; 7-11, CIL materials; and M subscript measured by Micromeritics Corp., others by NSW.

The surface area of charcoal²² is about 1000 m² gm⁻¹ and since charcoal constitutes 15.6 percent of black powder, an upper value of 156 m² gm⁻¹ would be expected. The measured values are much less, about 0.5 to 1.0 m² gm⁻¹. Therefore, it is concluded that almost all of the charcoal particles are sufficiently sealed to greatly reduce gas absorption. This could explain why burning rate was not found to be a function of the original surface area of charcoal or other carbon materials.²²

It also should be pointed out that the surface area measurements were extended from the original four samples to include all of the deviant lots. This was performed as a matter of convenience rather than preference over the pore size measurements, for at the time of analysis it was more expedient to extend the surface area measurements.

E. Density Measurements

The total free volume can also be calculated from the bulk density of black powder, ($D_{B.P.}$), the density of the separate ingredients, (D_i), and percent composition. Such values were taken from Table 1 and the following relationship, equation 3, was applied to a 100 gm sample. Ash and moisture content were not included.

$$\frac{100}{D_{B.P.}} = 100 \left[\frac{\% \text{ KNO}_3}{D_{\text{KNO}_3}} + \frac{\% \text{ S}}{D_{\text{S}}} + \frac{\% \text{ C}}{D_{\text{C}}} \right] + \text{free volume.} \quad (3)$$

Using a density of 1.17 for oak and 1.43 for maple charcoal (determined from charcoal extracted from lot 11) the total free volume was calculated. Values are given in Table 4 and Figure 20. They incorporate both isolated voids and accessible volume elements. Equation (3) can be used to show that the density of charcoal is a sensitive parameter that affects the free volume of black powder when a particular compression pressure is selected for manufacture. Moreover, compressing black powder to a particular density using different density charcoals will produce grains with varying degrees of free volume. One problem yet to be addressed is that no knowledge exists on the density variations for lot-to-lot procurement of charcoal. If a variance is found, compaction pressure and grain density will have to be adjusted accordingly to obtain the same free volume or a particular density.

In an attempt to measure the volume accessible from outside of the grain, the true density (D_T) was measured by an ether displacement technique. These values and the bulk density ($D_{B.P.}$) from Table 1, were related to the free volume for a 100 gm sample by the equation:

$$\frac{100}{D_{B.P.}} = \frac{100}{D_T} + \text{free volume.} \quad (4)$$

TABLE 4. FREE VOLUME IN BLACK POWDER

<u>Lot Number</u>	<u>Equation (3) cm³/100 gm</u>	<u>Equation (4) cm³/100 gm</u>	<u>Mercury Intrusion- to 0.1 μ cm³, 100 gm</u>	<u>Mercury Intrusion- to 0.003 μ cm³/100 gm</u>
1	2.22	1.41	1.5	3.9
2	3.61	3.99		
3	4.67	3.22		
4	1.64	2.65		
5	7.79	5.95		
6	3.93	2.22	1.0	5.1
7	6.36	5.92		
8	6.20	4.18		
9	7.23	3.88		
10	8.70	7.30	2.2	4.1
11	8.64	10.21	3.0	4.4

45

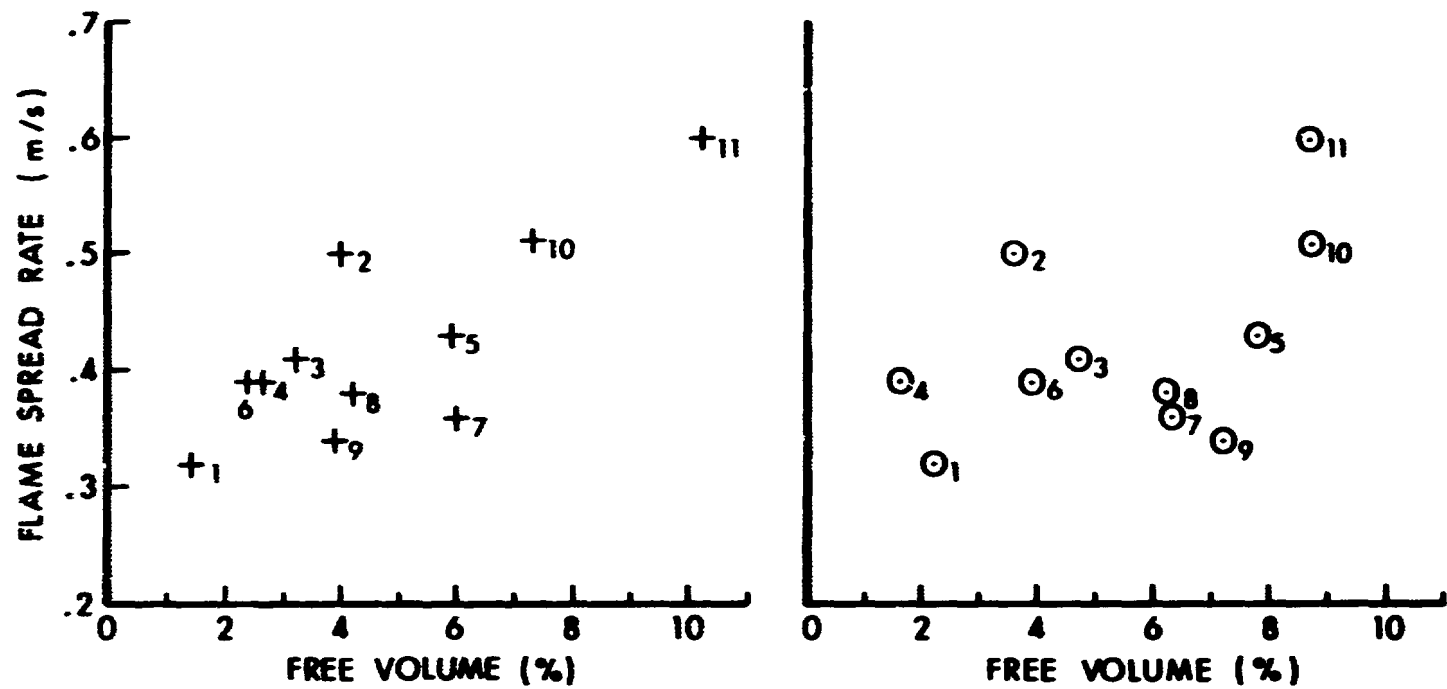


Figure 20. Relationship between flame spread rate and free volume. Subscripts refer to lot number: +, values calculated by equation (3) and \odot , values calculated by equation (4).

These values are listed in Table 4 and in Figure 20. Comparison of the free volumes obtained from equation (3) and (4) shows that in all cases, except lot 4 and lot 11, the total free volume including voids is larger than that accessible from outside of the grain. These volumes can be compared to the mercury intrusion values. One comparison is to relate the volume of mercury penetrating through passageways larger than 0.1 micron, a plateau in Figure 13, to the density derived values. In this case, the mercury values are smaller and this is reasonable as small diameter pores have not been penetrated. However, examining the smallest radii of 0.003 microns, the volumes are too large for lots 1 and 6. It is therefore concluded that the sharp rising asymptote occurring at the highest mercury pressures either elastically and/or inelastically constricts the black powder grain. For this reason, the mercury intrusion data is suspect beyond 10,000 psi or 70 kg cm⁻².

From the density measurements, both estimates of free volume are shown as a function of flame spread rate in Figure 20. The better correlation is given by the ether displacement volume reflecting the volume accessible from outside the grain.

If the volume occupied by moisture is considered, then it is clear that a small percentage of water could be significant in relation to the measured free volume of black powder. This could be the physical effect of water on burning rate. Shulman²⁵ and Plessinger⁷ have measured the effect of water on burning rate and their data is reproduced in Figure 21. Since there could be a difference in equipment, these data sets should be examined independently, but in either case the trend is clear and it is suggested here, based on inference alone, that water plugs and occupies passageways to retard burning rate.

V. FUTURE PLANS

The suggestion is made that for future work a density range and volatile content for charcoal be established. Also, compaction pressure for making black powder should be selected and it is proposed that surface area and porosity measurements guide this study. In selecting compaction pressure, die dimensions should be considered and the density distribution determined. The density of black powder is an indirect measure of gross structure being sensitive to the density of charcoal and particle size of ingredients. From present work, it is proposed that the internal structure be measured and controlled. In such a study it is proposed to generate a standard meal and form black powder samples that provide a greater variation in density, porosity and surface area to better document the effect of these variables.

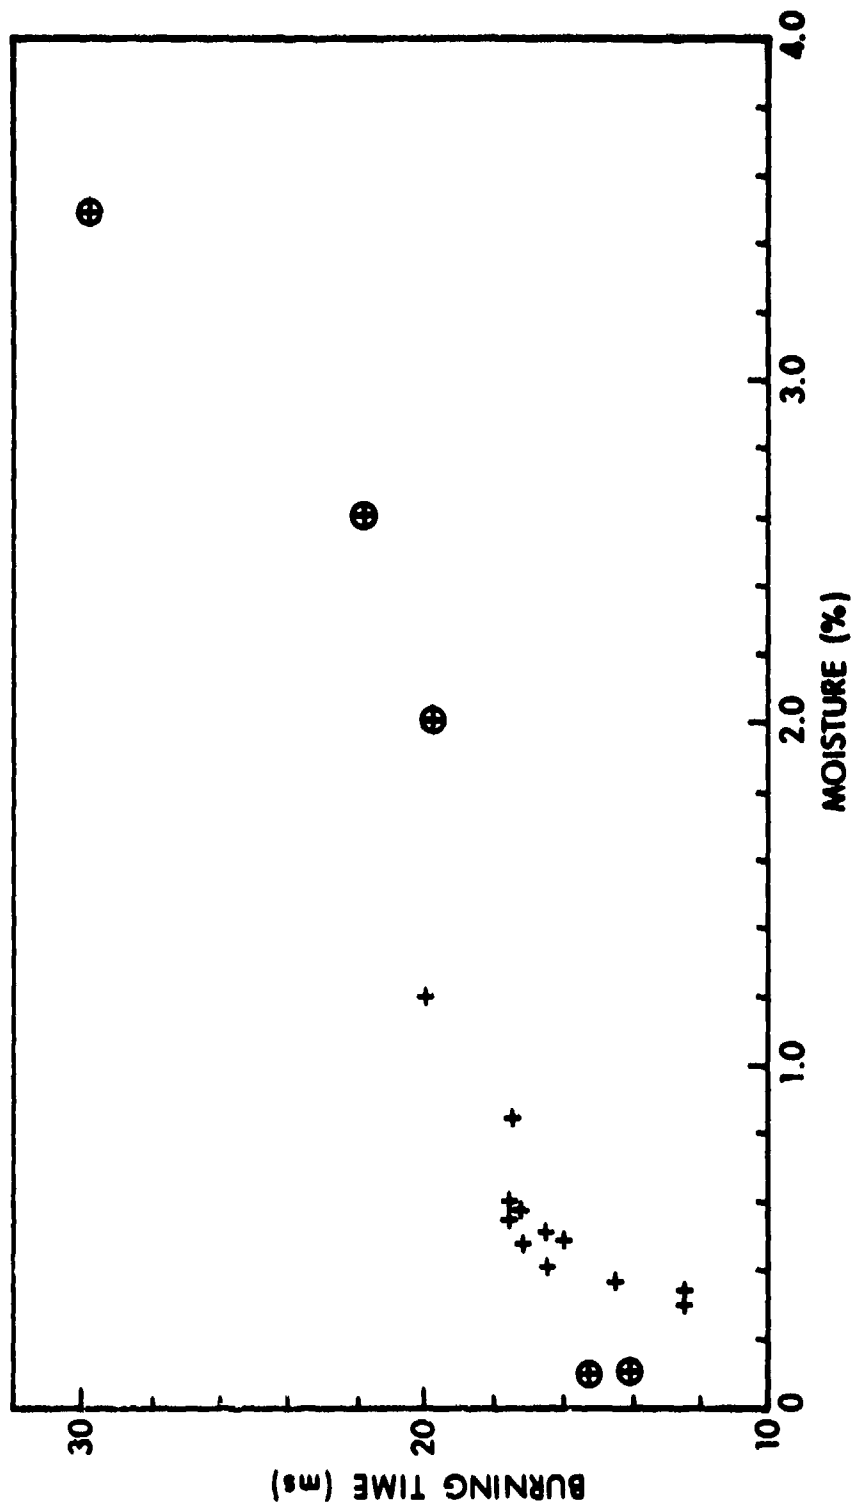


Figure 21. Relationship between burning time and moisture content

VI. SUMMARY

1. It was found that compaction of black powder meal produces considerable plastic flow and forms a conglomerate matrix of interconnecting passageways to the extent that the internal free volume is but a few percent.

2. Correlations between internal surface area, pore volume, and density were made with burning rate.

3. It was suggested that the adverse effect of water is the result of occupying the free volume of black powder and retarding burning rate.

4. From the above relationships and S.E.M. microphotographs the hypothesis was established that an increase in the degree of openness of black powder grains increases burning rate.

ACKNOWLEDGEMENTS

Assistance from several people was required to complete this study. The help and cooperation received was gratifying. I also drew extensively upon Kevin White's (ABB) experience with black powder; his counsel and advice are a hallmark of this study. Other credit is given in the text where appropriate; however I would like to mention here those individuals who assisted in this work: Ralph Benck (PMB), Dominic Di Berardo (PMB), John Gavel (Dupont), Gould Gibbons, Jr. (EEB), Eleanore Kayser (NSW), and Jean Owens (Micromeritics). Perspective was gained by conversations with Hugh Kerr (GOEX, Inc.) and Hugh Fidler (ICIA) and I thank both men for allowing me to tour their facilities. I also express my appreciation to Eli Freedman (ABB) for his translation of part of a French reference which is given as an appendix. I also thank Lois Smith for helping prepare this manuscript.

REFERENCES

1. Tadeusz Urbanski, Chemistry and Technology of Explosives, Vol 3, Pergamon Press, NY, pp. 322-346, (1967).
2. Arthur Marshall, Explosives, Sec. Ed. Vol 1, History and Manufacture, P. Blakiston's Son and Co., Philadelphia, (1917).
3. B. T. Fedoroff and O. E. Sheffield, Encyclopedia of Explosives and Related Items, Vol 2., PATR 2700, Picatinny Arsenal, Dover, NJ, p. B165-B178 (1962).
4. Arthur P. Vangelder and Hugo Schatter, History of the Explosive Industry in America, NY Columbia University Press, NY (1927).
5. Chromalloy Corporation, "A Study of Modernized Techniques for the Manufacture of Black Powder", Propellax Chemical Division, Final Report No. DAI-23-072-501-ORD-P-43, Jan 60, Chromalloy Corp., IL.
6. H. E. Carlton, B. B. Bohrer, and H. Nack, "Battelle Memorial Institute Final Report on Advisory Services on Conceptual Design and Development of New and Improved Processes for the Manufacture of Black Powder", Olin Corporation, Indiana Army Ammunition Plant, 20 Oct 1970, Charlestown, IN.
7. J. R. Plessinger and L. W. Braniff, "Final Report on Development of Improved Process for the Manufacture of Black Powder", RCS AMURE-109, Olin Corporation, Indiana Army Ammunition Plant, 31 Dec 1971, Charlestown, IN.
8. Indiana Ammunition Plant, "Black Powder Manufacturing Facility", Vol. 1 and 2, Indiana Army Ammunition Plant, 1975, Charlestown, IN.
9. Kjell Lovold, U.S. Patent No. 3660546, "Process for the Preparation of Black Powder", 2 May 1972.
10. J. Craig Alien, "The Adequacy of Military Specification MIL-P-223B to Assure Functionally Reliable Black Powder", Report No. ASRSD-QA-A-P-60, Ammunition Systems Reliability and Safety Div, Product Assurance Directorate, June 1974, Picatinny Arsenal, Dover, NJ.
11. H. William Voigt, Jr., Pell W. Lawrence and Jean P. Picard, "Process for Preparing Modified Black Powder Pellets", U.S. Patent, 3937771, Feb 10, 1976, see also H. W. Voigt and D. S. Downs, "Simplified Processing of Black Powder and Pyrotechnical Igniter Pills Including Low Residue Versions", Seventeenth International Pyrotechnics Seminar Vol. 2, ITT Research Inst., Chicago, IL, July 1980.
12. J. C. Allen, "Concept Scope of Work For MM&TE Project 5764303 Acceptance of Continuously Produced Black Powder", Report No. SARPA-QA-X-10, November 1975, Picatinny Arsenal Dover, NJ.

REFERENCES (Continued)

13. K. J. White, H. E. Holmes, J. R. Kelso Jr., A. W. Horst, and I. W. May, "Ignition Train and Laboratory Testing of Black Powder", ARRADCOM-BRL Report No. IMR-642, April 1979, APG, MD. See also K. J. White, H. E. Holmes, and J. R. Kelso, "Effect of Black Powder Combustion on High and Low Pressure Igniter Systems", 16th JANNAF Combustion Meeting, CPIA Publication 308, Dec 1979.
14. L. Shulman, private communication, (data quoted in reference 13), 15 Jan 1978, Picatinny Arsenal, Dover, NJ.
15. Hugh Fitler, private communication - Draft report, "Acceptance of Continuously Produced Black Powder", 8 March 1979, ICI America Corp., Charlestown, IN.
16. Neale A. Messina, Larry S. Ingram and Martin Summerfield, "Black Powder Quality Assurance Flame Spread Tester", Dec 1978, Princeton Combustion Laboratories, Inc., Princeton, NJ.
17. R. A. Noble and R. Abel, Phil. Trans. Roy. Soc., London, Series A Vol. 165, 49-155, (1875).
18. R. A. Noble and R. Abel, Phil. Trans. Roy. Soc., London, Series A 203-279 (1880).
19. F. A. Williams, "The Role of Black Powder in Propelling Charges", Picatinny Arsenal Tech. Report No. 4770, May 1975, Picatinny Arsenal, Dover, NJ.
20. James E. Rose, "Investigation on Black Powder and Charcoal", IHTR-433, Sept. 1975, Naval Ordnance Station, Indian Head, MD.
21. James E. Rose, "Black Powder - A Modern Commentary", Proc. of the 10th Symposium on Explosives and Pyrotechnics, 14-16, 1979, Franklin Research Inst. Philadelphia, Pa.
22. Abraham D. Kirshenbaum, Thermochemica, 18, 113, (1977).
23. J. D. Blackwood and F. P. Bowden, Proc. Roy. Soc., London, A213, 285, (1952).
24. Woldemar Hintze, Explosivstoffe, 2, 41, (1968).
25. L. Shulman, C. Lenchtiz, L. Bottei, R. Young and P. Casiano, "An Analysis of the Role of Moisture, Grain Size, and Surface Glaze on the Combustion and Functioning of Black Powder", Picatinny Arsenal Report No. 75-FR-G-B-15, Oct. 1975, Picatinny Arsenal, Dover, NJ.
26. L. Shulman, R. Young, E. Hayes and C. Lenchtiz, "The Ignition

REFERENCES (Continued)

Characteristics of Black Powder", Picatinny Arsenal Technical Report No. 1805, Sept, 1967, Picatinny Arsenal, Dover, NJ.

27. Clyde Orr Jr., Powder Technol., 3, 117 (1969/1970).
28. Arthur W. Adamson, Physical Chemistry of Surfaces, 2nd Ed., Interscience, NY, pp. 546-549 (1967).
29. E. Alison Flood, Ed., The Solid-Gas Interface, Vol. 1, Marcel Dekker Inc., NY, (1967).
30. R. M. McIntosh and A. P. Stuart, Can. J. Res., B24, 124 (1946).
31. Memorial Des Poudres Et Salpêtres, Vol. 6, Chapter II by M. Vieille, Gauthier-Villars Et Fils, Imprimeurs-Libraires, Paris, pp. 256-391, (1893).
32. Naval Ordnance Laboratory, Ordnance Explosive Train Designers Handbook, NOLR 1111, April 1952, Naval Ordnance Laboratory, White Oak, MD.
33. Robert C. Weast, ed., Handbook of Chemistry and Physics, 51st Ed., The Chemical Rubber Co., Cleveland, Ohio, (1970-1971).
34. A. A. Shidlovskii, "Principles of Pyrotechnics", Air Force Systems Command, Report No. AD-A001859, 23 Oct 1974, Wright Patterson AFB, OH, Translation of Izd Vo Masimostroyeniye, Osnovy Pirotekhnik, 3rd Ed., Moscow (1964).

APPENDIX
PARTIAL TRANSLATION OF VIELLE ARTICLE-REFERENCE 30 PAGES 306-325
by Eli Freedman

II. First Series--Agglomeration of Pulverized Materials

We have used the materials of RWP brown powder. These materials, ground and sieved through a silk gauze, were agglomerated dry by compression with a hydraulic press, using the steel mold already described.

We thus obtained pastilles of 20-mm diameter, about 3.5 mm high; and blocks of triple weight, 10.5 mm high. Six pastilles or 2 blocks of the same density constituted a charge of loading density 0.6; 3 pastilles or 1 block permitted the carrying out of comparative experiments at a loading density of 0.3.

The sections of the pistons used for the measurement of pressure were configured in a way to furnish similar crushings so as to make the tracings comparable: a piston of 0.5 cm² for the density 0.6, and the one of 1.33 cm² for the density of 0.3.

The crushings were carried to 3.5 mm and 4 mm by the use of copper cylinders similar to the regulation cylinders, but with a partially-reduced cross section, ratio of similitude $1/\sqrt{2}$.

Table 11, gives the results of the tests (only one half of the table is reproduced here given as illustration).*

TABLE 11

<u>Density</u>	<u>Thickness</u>	<u>Duration of Combustion</u>	
		<u>Density of Loading 0.6</u>	<u>Density of Loading 0.3</u>
1.922	10.44	98.07	125.0
1.785	11.19	87.13	108.80
1.760	11.47	48.33	74.57
1.724	11.65	17.36	28.78
1.635	12.09	5.22	12.01

The results of these 3 determinations are represented in Figure 15 (of text), whose abscissas represent the real densities of the pastilles, and the ordinates, the durations of combustion. [Curve reproduced in Sasse's text as Figure 2].*

* Brackets enclose translator's comments or notes.

These four curves have a common shape. At low densities up to a value of about 1.720, the duration of combustion is effectively independent of thickness whether the combustion occurs at a charge density of 0.3 under a maximum pressure of 1200 kg, or at a charge density of 0.6 under a pressure reaching 3000 kg. However, combustion time slowly increases up to four times the combustion time of elementary dust; then, suddenly, between densities of 1.720 and 1.800, the influence of thickness suddenly manifests itself and the combustion duration increases with extreme rapidity, tending to the limits characteristic of the compact materials; i.e., effectively proportional to the thicknesses.

This effect of compression is hardly unique to brown powders. The same functioning is observed with black powder materials reduced to the powdered state.

V. General Mode of Action of Compression

In summary, for all of the materials that we have reviewed here, the influence of compression on the duration of combustion occurs in an identical way.

Four regimes of compression can be distinguished which correspond to four very different combustion modes.

In the first regime, with the weakest compression, the combustion duration of the materials does not differ from that of the elements which compose it *placed next to each other*. It is consequently independent of thickness.

In the second compression regime, the combustion duration progressively rises up to values reaching 4 or 5 times those that correspond to the grains of elementary dust, but this duration nevertheless remains independent of the thickness. *It is this type of material that normally constitutes the black or brown powders actually used by artillery.*

The third regime is characterized by an extraordinarily rapid variation of combustion duration with density; the influence of thickness appears and is accentuated more and more. This type of material is sometimes introduced during manufacture, when compression is required to achieve excessive slowing-up of the duration of combustion of the elementary grain; but the extreme irregularity of the products does not normally permit these types of materials to be used.

In the fourth regime, the materials, now virtually compact, show durations of combustion slowly increasing with density and proportional to their thicknesses.

This succession of phenomena can be very simply explained, based on the known laws of gas flows through capillary orifices. It is known that

the discharge, Q , of fluids across capillary canals of all kinds is given by expressions of the type of Poiseuille's law,

$$Q = KPD^4/L$$

where D = diameter; P , pressure; L , length; and K , a coefficient characteristic of the fluid; and that consequently, the flow velocities, proportional to Q/D^2 , decrease with extreme rapidity with the dimension of the orifices.

It is conceivable that in the phenomenon of the penetration of incandescent [flaming] gas across a heterogeneous mass, the interstices of a certain order of magnitude, which will be called the first order, alone play an effective role; the orifices of lower order, e.g., 10 times less, permit the flame to propagate only with a velocity 100 times less.

In relation to the above ideas consider the material formed by agglomeration of grains at the lowest degree of compression. A system of interstices exists in the charge which assures flame spreading to all of the grains without a noticeable delay, or at least for a time duration negligible with respect to the combustion time of the grains themselves. This mode of combustion is made evident in the numerous examples given above, showing the identity of the durations of combustion of the free grain with the weakly-compressed blocks. This is the first phase of compression at work.

Under stronger compression the interstices are reduced by a sort of tangling of the grains, whose surfaces in contact become married in a more and more complete way while blocking or reducing to a very small dimension the entire grid of primitive interstices.

There results a new system of canals, whose dimensions remain of the original order; rather than limiting on the average each elementary grain, as in the primitive state, they limit a polyhedral kernel formed by the partial agglomeration of several grains; and it is readily conceivable that the average duration of combustion of these kernels can vary continuously with compression up to values double, triple, etc., the duration of combustion of the primitive grains without, however, a residual system of first-order canals ceasing to exist in the mass, thus assuring a combustion duration independent of the external dimension of the grain. This is the working of the second phase of compression.

Under increasing compression, the number of first-order canals is reduced enough so that the dimension of the kernels which they limit become of the order of a milled grain. One falls therefore into the irregularities which we have observed in the third phase of compression of the raw materials forming the grains at the moment where the influence of thickness is starting to be noticed. These irregularities continue

until all of the first-order canals have disappeared and the influence of thickness definitely shows up.

The fourth phase of compression starts at this moment. The materials approach the limiting state corresponding to a perfect continuum and the velocities of combustion vary only very slowly with density. It is in fact conceivable that this velocity results from the conductivity of the materials for the heat accruing from a *slow velocity of infiltration of glowing gas across* the second-order interstices, whose dimensions are progressively reduced. From there on, there is a slow decrease of combustion velocity, while the density rises up to the practically realizable limits.

VI. Influence of Pressure on the Duration of Combustion

The results in Tables XI, XII, and XIII relating to the influence of compression on the mode of combustion of the pulverized raw materials permit the deduction of several qualitative conclusions about the influence that pressure exerts on combustion velocity.

If one considers materials of density greater than 1.780, for which the proportionality of the duration of combustion to thickness is effectively realized, i.e., the materials that function as compact, one obtains the following numbers [in the table] for the ratio of the durations of combustion of the same elements to the charge densities 0.3 and 0.6 (maximum pressures 3200 and 1300 kg).

The general average of these numbers is about 1.25, and the exponent of the pressure that takes account of this variation of the duration of combustion is about 0.25. This value was previously noted in Chap. II, as resulting from the comparison of the durations of combustion of compacted materials of 30/40 powder burning at densities 0.3 and 0.6.

When one considers materials of density less than 1.780, the ratio rises rapidly and attains values greater than 2.00. Whatever the errors which lead to irregularities in the ratios obtained in some of the pairs of experiments, we can certainly conclude that the influence of pressure increases significantly when the compactness of the materials diminishes. The ratio 2.5 effectively recapitulates the proportionality of the durations of combustion to pressures.

The discrepancy of the pressure exponents given by experimenters to represent the influence of pressure on the combustion velocity is easily explained by the variable nature of the raw materials on which they worked.

In any case, it is evident that this effect of pressure cannot be, *a priori*, regarded as identical for powders of different factories, and that it is important to determine it for each particular case.

(----page 325----)

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
12	Commander Defense Technical Info Center ATTN: DDC-DDA Cameron Station Alexandria, VA 22314	1	Director US Army Armament Research and Development Command Product Assurance Division ATTN: DRDAR-GAS, C.J. Allen Dover, NJ 07801
1	Director Defense Advanced Research Projects Agency ATTN: LTC C. Buck 1400 Wilson Boulevard Arlington, VA 22209	6	Commander US Army Armament Materiel Readiness Command ATTN: DRSAR-LEP-L, Tech Lib DRSAR-IRC, G.H. Cowan DRSAR-LEM, R. Freedman DRSAR-PBB-P, J. Hill DRSAR-PDB-P, D. Howard DRSAR-QAM-A, A. Bruskas Rock Island, IL 61299
2	Director Institute for Defense Analyses ATTN: H. Wolfhard R.T. Oliver 400 Army-Navy Drive Arlington, Va 22202	1	Commander US Army Watervliet Arsenal ATTN: Code SARWV-RD, R. Thierry Watervliet, NY 12189
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDMD-ST 5001 Eisenhower Avenue Alexandria, VA 22333	1	Commander US Army Aviation Research and Development Command ATTN: DRSAV-E P.O. Box 209 St. Louis, MO 63166
2	Commander US Army Armament Research & Development Command ATTN: DRDAR-TSS Dover, NJ 07801	1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center Moffett Field, CA 94035
8	Commander US Army Armament Research and Development Command ATTN: DRDAR-LCA, J. Lannon DRDAR-LC, J.P. Picard DRDAR-SCA, L. Stiefel DRDAR-LCE, R.F. Walker DRDAR-LCA-G, D. Downs DRDAR-LCA-G, W. Voight DRDAR-LCA-G, R. Field DRDAR-LCA-G, P. Ostrowski Dover, NJ 07801	1	Commander US Army Communications Rsch and Development Command ATTN: DRDCO-PPA-SA Ft. Monmouth, NJ 07703

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. Of Copies</u>	<u>Organization</u>
1	Commander US Army Electronics Research & Development Command Technical Support Activity ATTN: DELSD-L Ft. Monmouth, NJ 07703	1	Commander US Army Research Office ATTN: Tech Lib P.O. Box 12211 Research Triangle Park, NC 27706
1	Commander US Army Missile Command ATTN: DRSMI-R Redstone Arsenal, AL 35809	1	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SL, Tech Lib White Sands Missile Range, NM 88002
1	Commander US Army Missile Command ATTN: DRSMI-YDL Redstone Arsenal, AL 35809	2	Office of Naval Research ATTN: Code 473, G. Neece 800 N. Quincy Street Arlington, VA 22217
1	Commander US Army Natick Research and Development Command ATTN: DRXRE, D. Sieling Natick, MA 01762	1	Commander Naval Sea Systems Command ATTN: J.W. Murrin (SEA-62R2) National Center Building 2, Room 6E08 Washington, DC 20362
1	Commander US Army Tank Automotive Rsch and Development Command ATTN: DRDTA-UL Warren, MI 48090	1	Commander Naval Surface Weapons Center ATTN: Library Br, DX-21 J. East Dahlgren, VA 22448
1	Commander US Army White Sands Missile Range ATTN: STEWS-VI WSMR, NM 88002	2	Commander Naval Surface Weapons Center ATTN: S.J. Jacobs/Code 240 Code 730 Silver Spring, MD 20910
1	Commander US Army Materials & Mechanics Research Center ATTN: DRXMR-ATL Watertown, MA 02172	1	Commander Naval Underwater Systems Center Energy Conservation Department ATTN: R.S. Lazar/Code 5B331 Newport, RI 02840

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Commander Naval Weapons Center ATTN: R. Derr C Thelen China Lake, CA 93555	1	ARO Incorporated ATTN: N. Dougherty Arnold AFS, TN 37389
1	Commander Naval Research Laboratory ATTN: Code 6180 Washington, DC 20375	1	Atlantic Research Corporation ATTN: M.K. King 5390 Cherokee Avenue Alexandria, VA 22314
5	Superintendent Naval Postgraduate School ATTN: Tech Lib D. Netzer A. Fuhs Monterey, CA 93940	1	AVCO Corporation AVCO Everett Research Lab Div ATTN: D. Stickler 2385 Revere Beach Parkway Everett, MA 02149
4	Commander Naval Ordnance Station ATTN: C. Dale C. Smith J. Rose Tech Lib Indian Head, MD 20640	2	Calspan Corporation ATTN: E.B. Fisher A.P. Trippe P.O. Box 400 Buffalo, NY 14221
4	AFATL-DL DL ATTN: O. Heiney J. Widden N. Junno LT. Loverro Eglin AFB, FL 32542	1	Foster Miller Associates, Inc. ATTN: A.J. Erickson 135 Second Avenue Waltham, MA 02154
2	AFOSR ATTN: L. Caveny B.T. Wolfson Bolling AFB, DC 20332	1	General Electric Company Armament Department ATTN: M.J. Bulman Lakeside Avenue Burlington, VT 05402
2	AFRPL (DYSC) ATTN: D. George J.N. Levine Edwards AFB, CA 93523	1	General Electric Company Flight Propulsion Division ATTN: Tech Lib Cincinnati, OH 45215
1	Aerojet Solid Propulsion Co. ATTN: P. Micheli Sacramento, CA 95813	1	GOEX Inc. ATTN: Hugh Kerr Berlin Plant Moosic, PA 18507
		1	GOEX Inc. ATTN: David Levey Route 3, Box 423 Cleburne, TX 76031

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Hercules Incorporated Alleghany Ballistic Lab ATTN: R. Miller Tech Lib Cumberland, MD 21501	1	Physics International Company 2700 Merced Street Leandro, CA 94577
1	Hercules Incorporated Bacchus Work ATTN: M. Beckstead Magna, UT 84044	1	Pulsepower Systems, Inc. ATTN: L.C. Elmore 815 American Street San Carlos, CA 94070
3	ICI Americas Inc. Indiana Army Ammunition Plant ATTN: R. Shultz G. Mcloskey H. Fivler Charlestown, IN 47111	1	Science Applications, Inc. ATTN: R.B. Edelman 23146 Cumorah Crest Woodland Hills, CA 91364
1	ICI Americas Inc. Central Engineering Department ATTN: W.C. Brill Wilmington, DE 19897	2	Rockwell International Corp. Rocketdyne Division ATTN: C. Obert J.E. Flanagan 6633 Canoga Avenue Canoga Park, CA 91304
1	Micromeritics Corp. ATTN: H. Rootare 5680 Goshen Springs Rd. Norcross, GA 30093	2	Rockwell International Corp. Rocketdyne Division ATTN: W. Haymes Tech Lib McGregor, TX 76657
1	Olin Corporation Badger Army Ammunition Plant ATTN: J. Ramnarace Baraboo, WI 53913	1	Safety Consulting Engineers, Inc. ATTN: C.J. Dahn 5240 Pearl Street Rosemont, IL 60018
2	Olin Corporation New Haven Plant ATTN: R.L. Cook D.W. Riefler 275 Winchester Avenue New Haven, CT 06504	1	Shock Hydrodynamics, Inc. ATTN: W.H. Anderson 4710-16 Vineland Avenue North Hollywood, CA 91602
1	Paul Gough Associates, Inc. ATTN: P.S. Gough P.O. Box 1614 Portsmouth, NH 03801	2	Thiokol Corporation Wasatch Division ATTN: I. Peterson Tech Lib P.O. Box 524 Brigham City, UT 84302

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Thiokol Corporation Elkton Division ATTN: E. Sutton Elkton, MD 21921	1	Case Western Reserve Univ. Division of Aerospace Sciences ATTN: J. Rien Cleveland, OH 44135
3	Thiokol Corporation Huntsville Division ATTN: D. Flanigan R. Glick Tech Lib Huntsville, AL 35807	3	Georgia Institute of Tech School of Aerospace Engineering ATTN: B.T. Zinn E. Price W.C. Strahle Atlanta, GA 30332
1	TRW Systems Group ATTN: H. Korman One Space Park Redondo Beach, CA 90278	1	Institute of Gas Technology ATTN: D. Gidaspow 3424 S. State Street Chicago, IL 60616
2	United Technologies Chemical Systems Div ATTN: R. Brown Tech Lib P.O. Box 358 Sunnyvale, CA 94086	1	Johns Hopkins University/APL Chemical Propulsion Informa- tion Agency ATTN: T. Christian Johns Hopkins Road Laurel, MD 20810
1	Universal Propulsion Co. ATTN: H.J. McSpadden 1800 W. Deer Valley Road Phoenix, AZ 85027	1	Massachusetts Institute of Technology Dept of Mechanical Engineering ATTN: T. Toong Cambridge, MA 02139
1	Battelle Memorial Institute ATTN: Tech Lib 505 King Avenue Columbus, OH 43201	1	Pennsylvania State University Applied Research Lab ATTN: G.M. Faeth P.O. Box 30 State College, PA 16801
1	Brigham Young University Dept of Chemical Engineering ATTN: M. Beckstead Provo, UT 84601	1	Pennsylvania State University Dept of Mechanical Engineering ATTN: K. Kuo University Park, PA 16801
1	California Institute of Tech 204 Karmar Lab Mail Stop 301-46 ATTN: F.E.C. Culick 1201 E. California Street Pasadena, CA 91125		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Princeton University Forrestal Campus ATTN: N. Messina Tech Lib P.O. Box 710 Princeton, NJ 08540	1	University of Minnesota Dept of Mechanical Engineering ATTN: E. Fletcher Minneapolis, MN 55455
2	Purdue University School of Mechanical Engineering ATTN: J. Osborn S.N.B. Murthy TSPC Chaffee Hall West Lafayette, IN 47906	2	University of Utah Department of Chemical Engineering ATTN; A. Baer G. Flandro Salt Lake City, UT 84112
1	Rutgers State University Dept of Mechanical and Aerospace Engineering ATTN: S. Temkin University Heights Campus New Brunswick, NJ 08903	1	North White Plains Senior High School ATTN: R.A. Nelson 96 Washington Avenue North White Plains, NY 10603
1	SRI International ATTN: Tech Lib 333 Ravenswood Avenue Menlo Park, CA 94025		<u>Aberdeen Proving Ground</u> Dir, USAMSAA ATTN: DRXSY-MP, H. Cohen DRXSY-D
1	Stevens Institute of Technology Davidson Library ATTN: R. McAlevy, III Hoboken, NJ 07030		Cdr, USATECOM ATTN: DRSTE-TO-F
1	University of California, San Diego Ames Department ATTN: F. Williams P.O. Box 109 La Jolla, CA 92037		Dir, USACSL Bldg E3516, EA ATTN: DRDAR-CLB-PA
1	University of Illinois Dept of Aeronautical Engineering ATTN: H. Krier Transportation Bldg, Rm 105 Urbana, IL 61801		

USER EVALUATION OF REPORT

Please take a few minutes to answer the questions below; tear out this sheet, fold as indicated, staple or tape closed, and place in the mail. Your comments will provide us with information for improving future reports.

1. BRL Report Number _____

2. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which report will be used.)

3. How, specifically, is the report being used? (Information source, design data or procedure, management procedure, source of ideas, etc.) _____

4. Has the information in this report led to any quantitative savings as far as man-hours/contract dollars saved, operating costs avoided, efficiencies achieved, etc.? If so, please elaborate.

5. General Comments (Indicate what you think should be changed to make this report and future reports of this type more responsive to your needs, more usable, improve readability, etc.) _____

6. If you would like to be contacted by the personnel who prepared this report to raise specific questions or discuss the topic, please fill in the following information.

Name: _____

Telephone Number: _____

Organization Address: _____

